


# Mounting profile U-System

for flexible light lines with flank dimension 17.5 mm

- high-quality mounting profile, suitable for all AQUALUC and FLEXLUC light lines with flank dimension 17.5 mm
- made of weather-resistant, anodized aluminum
- ideal for mounting long, uninterrupted light lines e.g. on facades
- suitable for many applications due to flexible mounting system (uneven mounting surfaces etc.)
- suitable for use as a surface-mounted profile
- practical connector system simplifies the installation of long light lines
- compact design with integrated cable duct

The flexible LED light line can be pressed directly into the profile from above or pushed in from the side for easy installation.


The sophisticated design with space for cables or plugs for concealed cable routing simplifies installation.

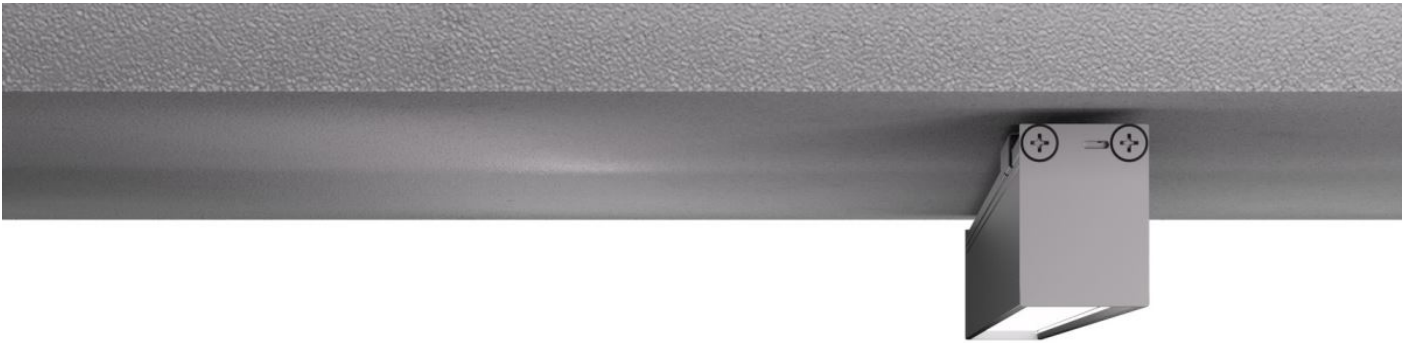

## ALUMINIUM PROFILE

	40500102	40500103
Description	U-system mounting profile	
Length	2000 mm	3000 mm
Width	21,1 mm	
Height	29,8 mm	
Material	Aluminium 6063	





## END CAPS


	<b>40500126</b>
<b>Description</b>	end cap set for U- and H-system mounting profiles, aluminum, anodized, 2 pieces
<b>Material</b>	aluminium
<b>Length</b>	2 mm
<b>Width</b>	21,1 mm
<b>Height</b>	29,8 mm

Note: The screws for the end caps must be placed and screwed in at a right angle (90°) to the screw channel and may only be screwed in with a max. tightening torque of 0.35 Nm to prevent the screw head from unscrewing or the screw from overtightening (recommended bit PH1).



## ACCESSORIES

	<b>40500127</b>	<b>62399919</b>
<b>Description</b>	mounting bracket set for U- and H-system mounting profiles, 304 stainless steel, 2 pieces	1x profile connector, incl. locking screws, suitable for GARGano, GARliano, CATania profile
<b>Material</b>	304 stainless steel	steel
<b>Finish</b>		vernickelt
<b>Length</b>	40 mm	45 mm
<b>Width</b>	22,2 mm	10 mm
<b>Height</b>	7,4 mm	2 mm



## NOTES

All aluminium profiles and covers are subject to certain length tolerances. This is +20/-0 mm irrespective of the length, i.e. a profile has at least the specified length, but can be up to 20 mm longer.

If you require an exact length, please specify this when ordering (article number 62397000).

Press marks or slight scratches on profiles are production-related and do not constitute a defect.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.