

LEDlight flex 16 8p STANDARD 500 IP66-MFC

- Length 500 cm
- LED strips with protection against dew humidity
- ideal for applications in environments with increased humidity (e. g. in bathrooms and protected outdoor areas)
- very good color rendering: CRI Ra typ. 90
- good efficiency: up to 118 lm/W at 4000 K
- long operating life L70 > 60,000 h at Tc < 80 °C
- current regulation by IC for constant brightness over the entire light line with integrated overheating protection
- with TVS surge protection diode
- with high-quality 3M double adhesive tape



*Abbildung ähnlich

Please observe the installation and safety instructions at <https://www.barthelme.de/content/en/manuals.aspx> !

PHOTOMETRIC DATA



	50410728T	50410733T	50410734T
Typ. color temperature	2700 K	3000 K	4000 K
Light color	warm white	white	cold white
Typ. luminous flux per meter	480 lm/m	530 lm/m	560 lm/m
Efficiency	100 lm/W	111 lm/W	118 lm/W
Energy efficiency class	A+	A++	
Typ. color rendering index	90		
LED beam angle	120 °		
Lifetime L70	>60000 h		

ELECTRICAL DATA

	50410728T	50410733T	50410734T
Operating voltage	24 V DC		
Typ. operating current	1000 mA		
Typ. power	24 W		
Typ. power per meter	4,8 W/m		
ESD protection	5000 V		

MECHANICAL DATA

	50410728T	50410733T	50410734T
Length stripe	5000 mm		
Width stripe	8 mm		
Height stripe	1,4 mm		
Number of LEDs per cut	6		
Number of cuts	50		
Length per cut	100 mm		
Type of protection	66-MFC		

*The LEDlight flex IP 66-MFC (= micro film coating) series has a silicone micro coating for protection against dew humidity. This means that applications in environments with increased humidity (e.g. bathrooms and protected outdoor areas) can also be equipped with Barthelme LEDlight flex lighting solutions. Since the MFC tapes, in contrast to the complete encapsulation of the AQUALUC series, have a wafer-thin coating, the LED strip must always be additionally protected by a suitable housing. For use in directly weathered areas, an IP-protected housing must be used. We recommend the use of approved bearded helmets, aluminium profiles as well as suitable covers and end caps. An IP66 test according to DIN EN 60598-1 was carried out for the test. The test specimen is exposed to a strong jet of water from all directions for 3 minutes. In order to achieve the dielectric strength according to DIN EN 60598-1, a suitable housing must also be used. Please note that the IP protective layer is damaged during cutting and soldering. To restore full

protection, the cut and solder joints must be resealed. A recommendation of our approved protective lacquers can be found at www.barthelme.de. The use of LED strip connectors to connect and join LED strips without tools is not permitted with the MFC strips.


FURTHER DATA

	50410728T	50410733T	50410734T
Max. operable length¹		10300 mm	
Storage temperature		-30° C ~ +80° C	
Max. temperature Tc²		80 ° C	

¹The value given applies to the application of the rated voltage at the first module section. When using a supply line, the maximum operable length changes depending on the supply line length and its cross section. At www.barthelme.de you will find an overview table for orientation.

² The Tc point is marked on each cut. This should be measured in the thermally stable state.


TECHNICAL DRAWING

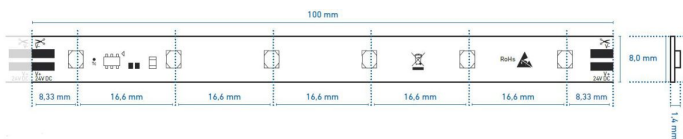

NOTE FOR INSTALLATION IN PROFILES

Never glue the LED strip over a profile joint! Due to physical expansion or contraction of the profile due to temperature fluctuations, the LED strip can be damaged. This can be remedied by using the right parts for the solder pads at the joint and by using flexible connections, e.g. soldered flexible wire bridges or LED strip connectors.

USE IN PROFILES

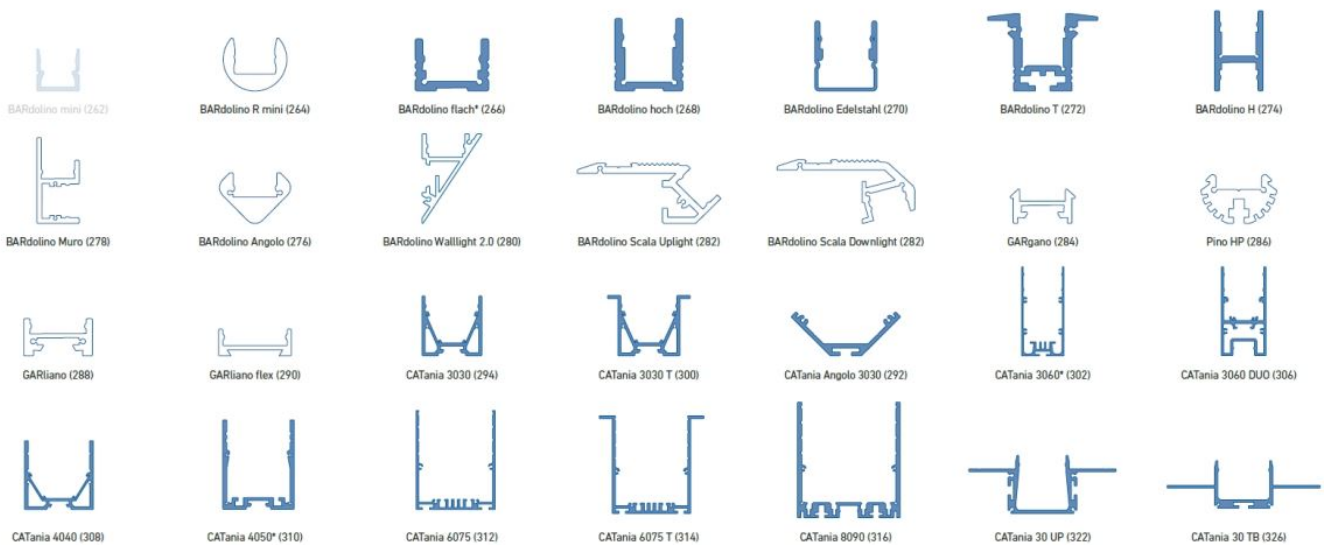

weiß: LED-Punkte sichtbar, kein homogenes Lichtbild | white: LED dots visible, no uniform light distribution
blau: homogenes Lichtbild möglich | blue: uniform light distribution is possible

* = eine homogene Lichtlinie ist nur in Kombination mit einer hohen Abdeckung möglich | a uniform light line is only possible in combination with a high diffuser

@ max. Ta = 25 °C im Betrieb und Montagesituation Aufbau [Einbau bei CATania 30 UP und CATania 30 TB] ansonsten ggf. unzureichende Kühlung | @ max. Ta = 25 °C in operation and surface mounted installation [recessed installation with CATania 30 UP and CATania 30 TB] otherwise possibility of insufficient cooling
Bitte beachten: Unzureichende Kühlung beschädigt den LED-Streifen! Verarbeitungshinweise zu LEDlight flex siehe S. 368 | Please note: insufficient cooling will damage the LED strips! Processing notes for LEDlight flex see p. 368

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.