

# LEDlight flex 08 8 STANDARD 1500

- Length 500 cm
- LED strips for common applications
- ideal for use in living areas
- good color rendering: CRI Ra typ. 90
- long operating life L70 > 60,000 h at Tc < 80 °C
- current regulation by IC for constant brightness over the entire light line with integrated overheating protection
- with TVS surge protection diode
- with high-quality 3M double adhesive tape



\*Abbildung ähnlich

Please observe the installation and safety instructions at <https://www.barthelme.de/content/en/manuals.aspx> !

Note re light sources/EPREL: Our LED reels are not subject to classification according to the currently valid regulations. An LED reel contains interconnected light sources, the number and energy efficiency class of which are listed in the data sheet.



## PHOTOMETRIC DATA

	50411328	50411333	50411334
Typ. color temperature	2700 K	3000 K	4000 K
Light color	warm white	white	cold white
Typ. luminous flux per meter	1400 lm/m	1580 lm/m	1640 lm/m
Efficiency	97 lm/W	110 lm/W	114 lm/W
Built-in light source	C50011328	C50011333	C50011334
Number of light sources	100		
EEC of built-in light source	F		
Typ. color rendering index	90		
LED beam angle	120 °		
Lifetime L70	>60000 h		

## ELECTRICAL DATA

	50411328	50411333	50411334
Operating voltage	24 V DC		
Typ. operating current	2,96 A		
Typ. power	71 W		
Typ. power per meter	14,4 W/m		

## MECHANICAL DATA

	50411328	50411333	50411334
Length stripe	5000 mm		
Width stripe	8 mm		
Height stripe	1,4 mm		
Number of LEDs per cut	6		
Number of cuts	100		
Length per cut	50 mm		
Type of protection	IP 00		
	50011328	50011333	50011334
Color temperature	2700 K	3000 K	4000 K
EEC of built-in light source	F		
Cut	Cut		

**ORDER YOUR DESIRED INDIVIDUAL STRIP LENGTH [CUT]:** The order quantity is a multiple of the smallest cutting length of the LED strip (cut). Ordering example: To order your required length of 210 cm of LEDlight flex High Efficiency 08 8 cool white (4000 K): 35x Art.-No. 50008634 (cut length 60 mm x 35 = 210 cm). If you re-quire varying strip lengths then please order each strip length as a separate position.


## FURTHER DATA

	50411328	50411333	50411334
<b>Max. operable length<sup>1</sup></b>		5000 mm	
<b>Storage temperature</b>		-30° C ~ +80° C	
<b>Ambient temperature Ta</b>	XXXX ° C		

<sup>1</sup>The value given applies to the application of the rated voltage at the first module section. When using a supply line, the maximum operable length changes depending on the supply line length and its cross section. At [www.barthelme.de](http://www.barthelme.de) you will find an overview table for orientation.

<sup>2</sup> The Tc point is marked on each cut. This should be measured in the thermally stable state.


## TECHNICAL DRAWING

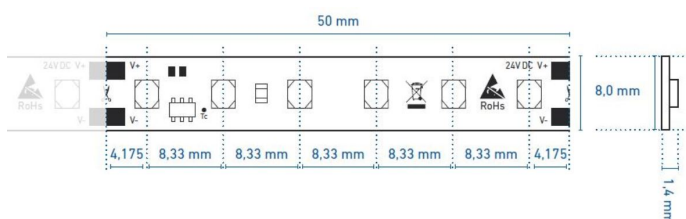

## NOTE FOR INSTALLATION IN PROFILES

Never glue the LED strip over a profile joint! Due to physical expansion or contraction of the profile due to temperature fluctuations, the LED strip can be damaged. This can be remedied by using the right parts for the solder pads at the joint and by using flexible connections, e.g. soldered flexible wire bridges or LED strip connectors.

## USE IN PROFILES

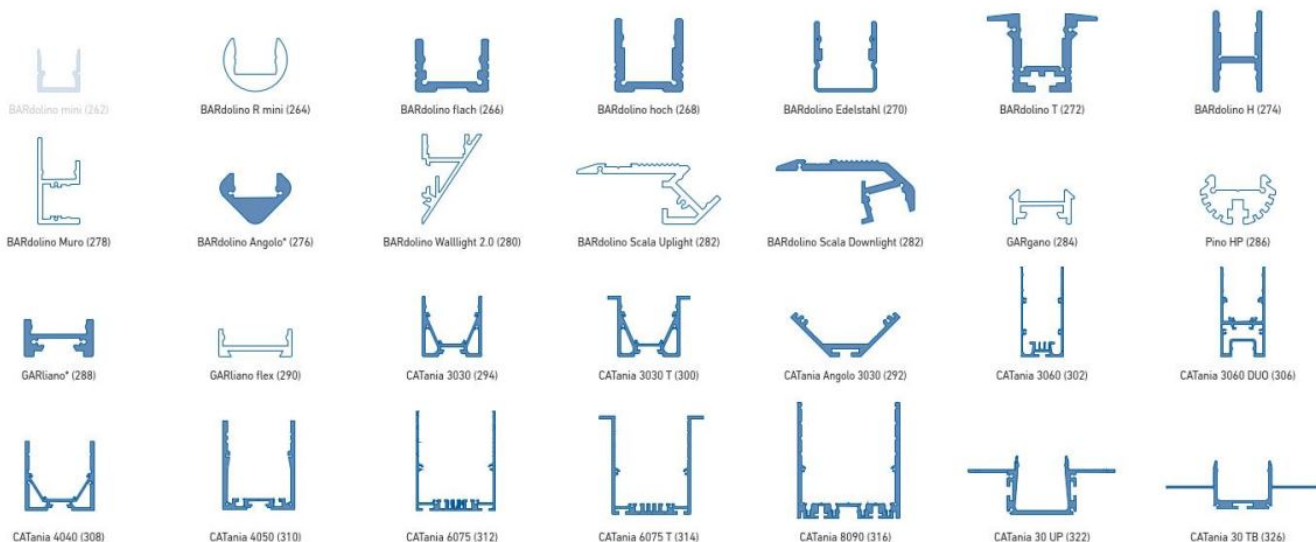

weiß: LED-Punkte sichtbar, kein homogenes Lichtbild | white: LED dots visible, no uniform light distribution

blau: homogenes Lichtbild möglich | blue: uniform light distribution is possible

\* = eine homogene Lichtlinie ist nur in Kombination mit einer hohen Abdeckung möglich | a uniform light line is only possible in combination with a high diffuser

@ max. Ta = 25 °C im Betrieb und Montagesituation Aufbau [Einbau bei CATania 30 UP und CATania 30 TB] ansonsten ggf. unzureichende Kühlung | @ max. Ta = 25 °C in operation and surface mounted installation [recessed installation with CATania 30 UP and CATania 30 TB] otherwise possibility of insufficient cooling  
Bitte beachten: Unzureichende Kühlung beschädigt den LED-Streifen! | Please note: insufficient cooling will damage the LED strips!

## NOTE

LEDs and the electronic components/devices required for their operation are wearing parts and can function for many years depending on use and location. In general, these products are subject to an aging process, the light output of LEDs decreases in the course of their operating life. The aging of LEDs is due to thermal influences. Our LEDs correspond to the operating life, which has e.g. a L90/B10 value. This means that the installed LEDs of a given type retain at least 90% of their luminous efficiency and a maximum of 10% of the installed LEDs can deviate from this. Thus, the decrease of the luminous effect of the LED within the above-mentioned scope within the operating life does not represent a defect according to the current state of technology.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.