

Merano Saunalinearleuchte

Leuchte aus eloxiertem Aluminium - Indoor


- lineare Leuchte zur indirekten Beleuchtung - für Decken- und Wandmontagen in Trockensaunen bis maximal 100 °C betreibbar
- Länge individuell von 85 bis maximal 505 mm, inkl. Endkappen
- verschiedene Halter ermöglichen individuelle Befestigungslösungen und Ausrichtung des Lichts
- erhältlich in 2700 K warmweiß, mit opaler Abdeckung
- durch Verbinder Aneinanderreihung mehrerer Leuchten möglich
- inkl. 5 m Teflonkabel mit freien Drahtenden
- Lebensdauerabschätzung L70 bei Ta < 100 °C > 60.000 h



TECHNICAL DATA

	62379002	62379003	62379004	62379005
Variant / Length	85 mm	145 mm	205 mm	265 mm
Operating voltage	24 V DC			
Typ. color temperature	2700 K			
Typ. luminous flux	32 lm	64 lm	95 lm	127 lm
Typ. power	0,5 W	1 W	1,5 W	2 W
EEC of installed light source(s)	E			
Max. ambient temperature Ta	+100 °C			
Max. temperature Tc	110 °C			
	62379006	62379007	62379008	62379009
Variant / Length	325 mm	385 mm	445 mm	505 mm
Operating voltage	24 V DC			
Typ. color temperature	2700 K			
Typ. luminous flux	158 lm	189 lm	221 lm	252 lm
Typ. power	2,4 W	2,9 W	3,4 W	3,8 W
EEC of installed light source(s)	E			
Max. ambient temperature Ta	+100 °C			
Max. temperature Tc	110 °C			

TECHNICAL DRAWING

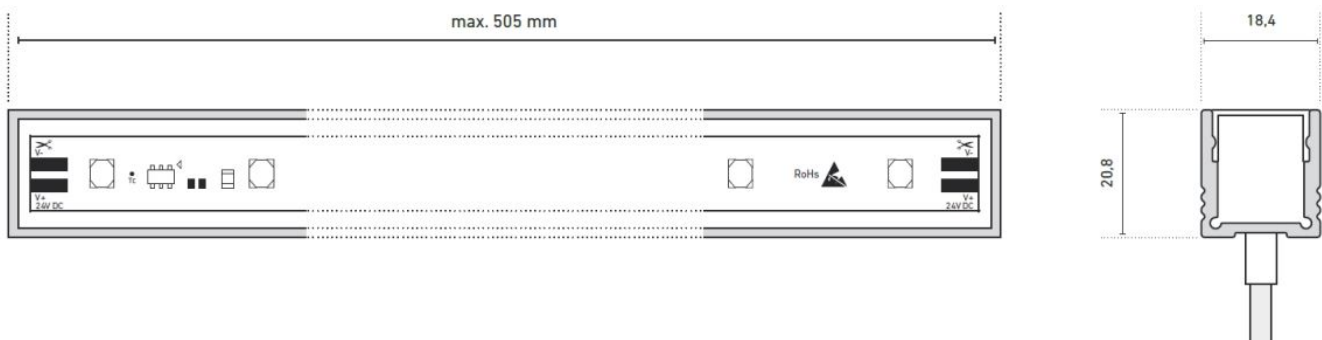

ACCESSORIES

	50990090	50990091	50990190	50990191	50990291
Description	2x mounting clips, incl. screws, suitable for profiles of the BARdolino family	2x mounting clips 45°, incl. screws, suitable for profiles of the BARdolino family	mounting clip set, incl. 2 holding clips + 2 screws, high holding force, suitable for profiles of the BARdolino family	2x mounting clips pivoted, incl. screws, suitable for profiles of the BARdolino family	1x metal connector, suitable for profiles of the BARdolino family
Material	304 stainless steel				
Length	12 mm		14 mm	18,8 mm	60 mm
Width	19,3 mm	15,4 mm	20,81 mm	32,3 mm	19,5 mm
Height	8 mm	18,6 mm	9,1 mm	22,4 mm	6,2 mm



NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.