

CATania 43125 DUO wall profile

- high quality wall profile made of aluminum, powder coated
- ideal for indirect lighting via wall reflection
- with horizontal mounting optionally upward and/or downward
- with vertical mounting optionally to the left and/or to the right
- with integrated cable guide
- power supplies 66000315 and 66000316 can be integrated
- basic profile in RAL 9016 (traffic white), front panel optionally in RAL 9016 (traffic white) or RAL 9005 (deep black)
- suitable for LED strips of the LEDlight flex family or boards according to Zhaga classes L28W2 and L56W2
- mounting surfaces of the light sources are not powder coated, for optimum bonding strength of adhesive strips and heat dissipation
- front panel can be optionally fastened in a vandal proof way




Please refer to the notes on expansion and assembly at the end of the data sheet!

ALUMINIUM PROFILE

	62393151	62393152	62393153	62393155
Length	1000 mm	2010 mm	3020 mm	5030 mm
Width	102 mm			
Height	41 mm			
Colour	white RAL 9016			
Material	Aluminium EN AW 6060			
Finish	anodised			
Weight	1969 gr	3957 gr	5946 gr	9904 gr

DIMENSIONED DRAWING

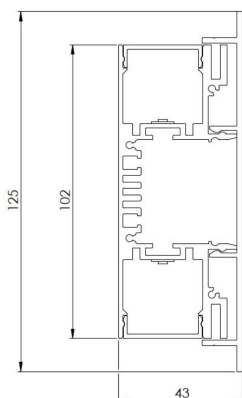

FRONT COVER

	62393161	62393171
Description	Front panel, aluminum, powder coated RAL 9005 (deep black)	Front panel, aluminum, powder coated RAL 9016 (traffic white)
Material	Aluminium EN AW 6060	
Finish	anodised	
Colour	schwarz RAL9005	weiß 9016
Length	1000 mm	
Width	125 mm	
Height	14 mm	

For other lengths please replace the last digit of the article number by: 2 = 2.01m / 3 = 3.02m / 5 = 5.03m



COVER

	62399821	62399851	62399861
Description	Diffuser opal, for a homogenous and glare-free light distribution	Diffuser satined, little light consumption and hiding technical view at the same time	Diffuser clear, for maximum light yield and protection of the LED strip
Material	PMMA		
Version	opal white	satined	clear
Transmission in %	77	84	91
Length	1000 mm		
Width	27,4 mm		
Height	7,9 mm		

For other lengths please replace the last digit of the article number by: 2 = 2.01m / 3 = 3.02m / 5 = 5.03m



END CAPS


	62399719	62399720
Description	2 end caps incl. 4 screws	
Material	Aluminium EN AW 6060	
Colour	white RAL 9016	black RAL 9005
Length	2 mm	
Width	43,5 mm	
Height	125 mm	

Note: The screws for the end caps must be placed and screwed in at a right angle (90°) to the screw channel and may only be screwed in with a max. tightening torque of 0.35 Nm to prevent the screw head from unscrewing or the screw from overtightening (recommended bit PH1).



ACCESSORIES

	62393157	62398802	62398803
Description	Screw set for fixing the front panel, 6 x drilling screw	2x straight connectors, metal, incl. 8 grub screws	2x connectors, 90° angle, metal, incl. 8 grub screws
Material	steel	304 stainless steel	
Finish	galvanized	nut treated	
Colour	silver		silbergrau
Length	100 mm	80 mm	50,5 mm
Width	60 mm	10,5 mm	50,5 mm
Height	5 mm	1,7 mm	

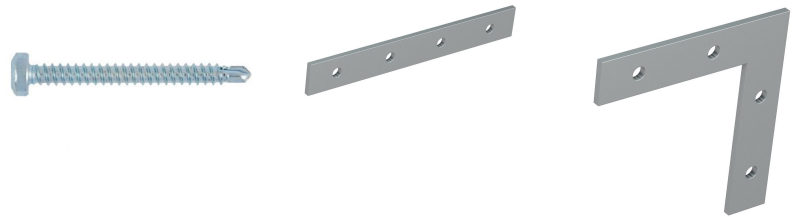

All aluminium profiles and covers are subject to certain length tolerances. This is +20/-0 mm irrespective of the length, i.e. a profile has at least the specified length, but can be up to 20 mm longer.

If you require an exact length, please specify this when ordering (article number 62397000).

Please note that the materials aluminum and PMMA can expand when the temperature changes vary greatly. With a temperature change of 20°C the expansion difference can be up to 1.2 mm per meter! This is no deficiency of the product but a normal physical process.

Installation note: If you directly install two aluminum profiles edge to edge (without end caps), please pay attention during installation, that you don't glue the LED strip directly over the joint, since the profiles at temperature fluctuations - especially at large lengths - will expand/contract (s. section 1) and then the LED tape may be damaged. At joints the LED strip has to be cut at the marked positions and reconnected with flexible solder bridges with corresponding expansion reserve (min. 5mm).

Intended Use

Profile:

- The LED profiles are a component for the reception of LED strips approved for this purpose. In combination with optional accessories such as covers, end caps, inserts, etc., LED luminaires can be produced which are used exclusively for general lighting or accent lighting and therefore do not serve emergency or safety lighting in particular.
- The assembly is carried out via appropriate holders or suspensions, which are offered as accessories. For brackets we recommend 3 brackets per running meter. The profiles are designed for mounting on a stable and straight surface. Depending on the substrate and local conditions, a higher number of brackets may be required and/or the installation material supplied (screws/plugs) must be replaced with suitable mounting material. The brackets must not be bent during assembly, as this has an influence on the holding force. It may not be possible to use the holders provided. Alternatively, the profile can be screwed directly to the substrate. In any case, the installer must ensure that the system is held securely.
- Make sure that the profile expands due to thermal influences. Sufficient space must be kept available for this purpose..
- The mounting instructions for the LED strips and power supplies must be viewed separately.
- The profile is to be used exclusively for the above shown installation situations.

Covers:

- All plastic covers made of PMMA have first-class photometric properties, but are very brittle due to the material, which means that the cover can splinter when subjected to mechanical influences (bending, sawing, other processing). There is a risk of injury, wear safety glasses and gloves! Plastic covers made of PC are not affected.
- PMMA or PC have a higher coefficient of thermal expansion than aluminium. This means that light slits may appear at the joints and terminations of the plastic covers, especially when the unit is not yet at operating temperature..
- To ensure that the cover is held securely, it must be clipped into the holding groove provided for this purpose along its entire length. In any case, the installer must ensure that the system is held securely.
- Alcoholic detergents remove plasticizers from the plastic profiles, which means that they lose their flexibility and can form cracks even when installed. We recommend cleaning only with a damp (clear water), soft cloth.

Accessories (end caps, holders, etc.):

- An LED profile and its accessories are not toys - these components may only be operated by persons who can assess the risks involved in handling them. There is a danger of swallowing small parts.

NOTES

Press marks or slight scratches on profiles are production-related and do not constitute a defect.

Loose, wipeable impurities may appear on the aluminum and plastic profiles. This is due to the production and its handling and does not represent a defect. We generally recommend cleaning the profiles with a soft, lint-free cloth (if necessary with a little clear water) before installation. The LED bonding surface must also be free of grease to ensure good adhesion of the LED strip. Corresponding information can be found in the instructions for the LED strips.

The adhesion of our LEDlight flex strips to the profiles we offer and their different surfaces has been tested and can be ensured if the processing instructions are followed. If there are adhesion problems between LED strips and aluminum profiles, we recommend pre-treatment with the adhesion promoter "3M™ Tape Primer 94".

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.