

CATania 3060 Blackline

Aluminium profile black anodised


- high-quality profile made of aluminium, black anodised
- can be used flexibly as a surface-mounted or luminaire profile
- also available with black cover for design-relevant projects
- power supplies 66000315 and 66000316 integrable
- in combination with opal black or opal white diffusers and the matching LEDlight flex (up to pitch 15), a homogeneous light line is possible



Please refer to the notes on expansion and assembly at the end of the data sheet!

ALUMINIUM PROFILE


	62398771	62398772	62398773	62398775
Length	1000 mm	2010 mm	3020 mm	5030 mm
Width	30 mm			
Height	60 mm			
Colour	schwarz			
Material	Aluminium EN AW 6060			
Finish	anodised			
Weight	742 gr	1484 gr	2226 gr	3710 gr



INLAY

	62398781
Description	CATania 30 insertion profile, aluminium, black anodised, for LED boards with a max. width of 23.5 mm
Material	Aluminium EN AW 6060
Finish	anodised
Colour	black
Length	1000 mm
Width	27,4 mm
Height	7,9 mm

For other lengths please replace the last digit of the article number by: 2 = 2.01m / 3 = 3.02m / 5 = 5.03m



COVER

	62398851	62399691	62399821	62399841	62399851	62399861	62399871
Description	anodised aluminium cover	cover opal black, PMMA, for a homogenous and glare-free light distribution	Diffuser opal, for a homogenous and glare-free light distribution	Diffuser high, opal, 180° for an all round homogenous light emission	Diffuser satined, little light consumption and hiding technical view at the same time	Diffuser clear, for maximum light yield and protection of the LED strip	prisma cover to reduce the dazzling effect
Material	aluminium	PMMA					
Version	aluminium	opalschwarz	opal white		satined	clear	prisma
Transmission in %	0	22	77		84	91	
Length	1000 mm						
Width	27,4 mm			30 mm	27,4 mm		
Height	7,9 mm			27,8 mm	7,9 mm		

For other lengths please replace the last digit of the article number by: 2 = 2.01m / 3 = 3.02m / 5 = 5.03m



END CAPS

	62398777
Description	CATania 3060 end caps, screwless visible surface, aluminium, black anodised, 2 pcs, incl. 2 grub screws
Material	Aluminium EN AW 5052
Colour	schwarz
Length	2 mm
Width	30 mm
Height	60 mm



ACCESSORIES

	62398802	62398803	62398806	65400170
Description	2x straight connectors, metal, incl. 8 grub screws	2x connectors, 90° angle, metal, incl. 8 grub screws	profile connector set adjustable, 304 stainless steel, 2 pieces, incl. grub screws, for an angled light line	suspension for ceiling installation (2x 150 cm wire cable Ø 1 mm, 2x suspension brackets, 2x profile brackets)
Material	304 stainless steel			various
Finish	nut treated			chrome-plated
Colour	silbergrau			silber
Length	80 mm	50,5 mm	104 mm	1500 mm
Width	10,5 mm	50,5 mm	10,5 mm	
Height	1,7 mm		7 mm	
Remarks				Workload: 8 kg/bracket (16 kg/set)



All aluminium profiles and covers are subject to certain length tolerances. This is +20/-0 mm irrespective of the length, i.e. a profile has at least the specified length, but can be up to 20 mm longer.


If you require an exact length, please specify this when ordering (article number 62397000).

Please note that the materials aluminum and PMMA can expand when the temperature changes vary greatly. With a temperature change of 20°C the expansion difference can be up to 1.2 mm per meter! This is no deficiency of the product but a normal physical process.

Installation note: If you directly install two aluminum profiles edge to edge (without end caps), please pay attention during installation, that you don't glue the LED strip directly over the joint, since the profiles at temperature fluctuations - especially at large lengths - will expand/contract (s. section 1) and then the LED tape may be damaged. At joints the LED strip has to be cut at the marked positions and reconnected with flexible solder bridges with corresponding expansion reserve (min. 5mm).

Please note that damage to the surface (e.g. scratches) removes superficial anodising and the silver raw material becomes visible. Handling and assembly must be handled with due care.

Installation situations

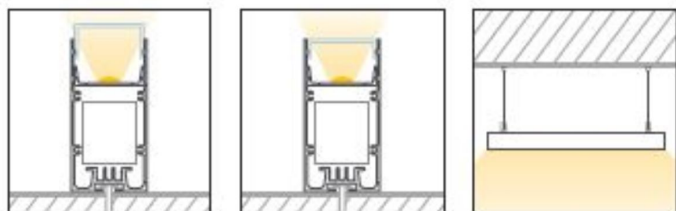

Intended Use

Profile:

- The LED profiles are a component for the reception of LED strips approved for this purpose. In combination with optional accessories such as covers, end caps, inserts, etc., LED luminaires can be produced which are used exclusively for general lighting or accent lighting and therefore do not serve emergency or safety lighting in particular.
- The assembly is carried out via appropriate holders or suspensions, which are offered as accessories. For brackets we recommend 3 brackets per running meter. The profiles are designed for mounting on a stable and straight surface. Depending on the substrate and local conditions, a higher number of brackets may be required and/or the installation material supplied (screws/plugs) must be replaced with suitable mounting material. The brackets must not be bent during assembly, as this has an influence on the holding force. It may not be possible to use the holders provided. Alternatively, the profile can be screwed directly to the substrate. In any case, the installer must ensure that the system is held securely.
- Make sure that the profile expands due to thermal influences. Sufficient space must be kept available for this purpose..

- The mounting instructions for the LED strips and power supplies must be viewed separately.
- The profile is to be used exclusively for the above shown installation situations.

Covers:

- All plastic covers made of PMMA have first-class photometric properties, but are very brittle due to the material, which means that the cover can splinter when subjected to mechanical influences (bending, sawing, other processing). There is a risk of injury, wear safety glasses and gloves! Plastic covers made of PC are not affected.
- PMMA or PC have a higher coefficient of thermal expansion than aluminium. This means that light slits may appear at the joints and terminations of the plastic covers, especially when the unit is not yet at operating temperature..
- To ensure that the cover is held securely, it must be clipped into the holding groove provided for this purpose along its entire length. In any case, the installer must ensure that the system is held securely.
- Alcoholic detergents remove plasticizers from the plastic profiles, which means that they lose their flexibility and can form cracks even when installed. We recommend cleaning only with a damp (clear water), soft cloth.

Accessories (end caps, holders, etc.):

- An LED profile and its accessories are not toys - these components may only be operated by persons who can assess the risks involved in handling them. There is a danger of swallowing small parts.

NOTES

Press marks or slight scratches on profiles are production-related and do not constitute a defect.

Loose, wipeable impurities may appear on the aluminum and plastic profiles. This is due to the production and its handling and does not represent a defect. We generally recommend cleaning the profiles with a soft, lint-free cloth (if necessary with a little clear water) before installation. The LED bonding surface must also be free of grease to ensure good adhesion of the LED strip. Corresponding information can be found in the instructions for the LED strips.

The adhesion of our LEDlight flex strips to the profiles we offer and their different surfaces has been tested and can be ensured if the processing instructions are followed. If there are adhesion problems between LED strips and aluminum profiles, we recommend pre-treatment with the adhesion promoter "3M™ Tape Primer 94".

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.