


# TRIESTE surface-mounted downlight Controlled White CV

- dimmable downlight series consisting of surface-mounted luminaires
- puristic design in matt signal white, available in round or rectangular form
- ideal for interior illumination in hotels, restaurants, bars or public buildings
- adjustable color temperature from 2700 K to 5000 K; HCL-Ready
- CV version: easily combinable with LED strips in a lighting system by using the same power supply
- available as CC version on request

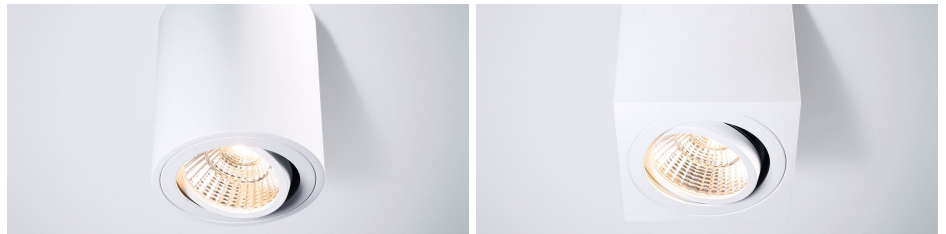

## LIGHT DATA

	62407330	62408330
Typ. color temperature	2700 K~5000 K	
Light color	warm white~cold white	
Typ. luminous flux	1620 lm	
Efficiency	113 lm/W	
Energy efficiency class	A+	
Typ. color rendering index	80	
SDCM MacAdam	3	
Beam angle	38 °	
Remarks	dimmable	



## POWER DATA

	62407330	62408330
Operating voltage DC	24 V DC	
Operating current	600 mA	
Typ. power	14,3 W	
LED type	NICHIA LED NCSWE 17AT	

## FURTHER DATA

	<b>62407330</b>
Height	95 mm
Diameter	80 mm
Type of protection	IP 40
Cable length	300 mm
Max. temperature Tc	75 ° C
Max. ambient temperature Ta	40 ° C
	<b>62408330</b>
Length	80 mm
Width	80 mm
Height	95 mm
Type of protection	IP 40
Cable length	300 mm
Max. temperature Tc	75 ° C
Max. ambient temperature Ta	40 ° C

## DIMENSIONED DRAWING

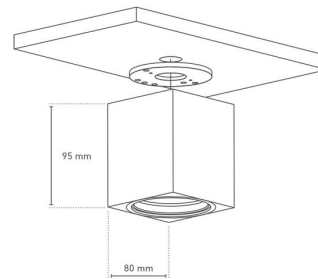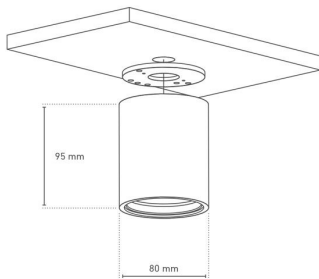

The guarantee period for the product is 3 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.