


Spot It L garden spotlight 115 mm - 230 V AC

dimnable - rotatable/swiveling - colour temperature selectable

- Compact, dimmable LED garden spotlight with a slim, elegant design
- IP67-certified cast aluminum luminaire housing, corrosion-treated and powder-coated
- Color temperature: 3000 K / 4000 K - selectable via dip switch
- Simple installation thanks to direct connection to 230 V AC mains voltage. Dimmable with most commercially available dimmers
- Includes 2 m connection cable: 3-pole
- Mounting with enclosed ground spike or separately available accessories
- 360° rotatable, 180° tiltable

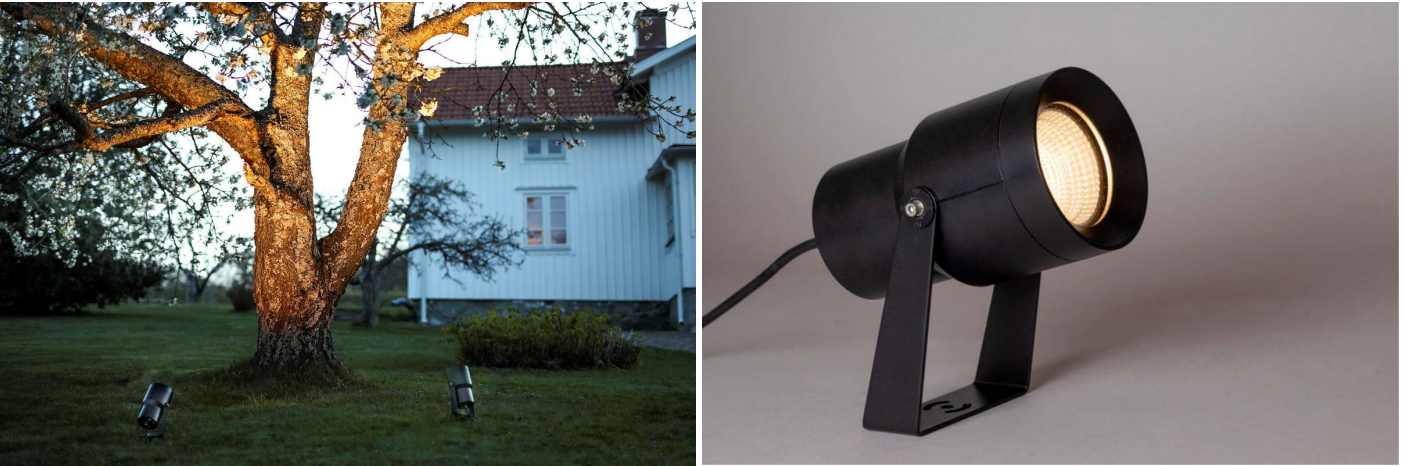

LIGHT DATA

IP67

84 lm/W

SDCM 3

230 V AC

DIMM

IK10

85°Tc

	62424200	62424300
Color of body	black	
Typ. color temperature	3000 K + 4000 K	
Light color	white	
Typ. luminous flux	2100 lm	
Efficiency	84 lm/W	
Typ. color rendering index	>80	
SDCM MacAdam	3	
Beam angle	15 °	38 °
Number of LEDs	1	

POWER DATA



	62424200	62424300
Operating voltage AC	230 V AC	
Operating current	109 mA	
Typ. power	25 W	

FURTHER DATA

	62424200	62424300
Length	195 mm	
Diameter	115 mm	
dimable via	Trailing Edge	
Driver included	Yes	
Type of protection	IP 67	
Protection class	I	
Indoor/Outdoor	Outdoor	
Material	aluminium	
Finish	powder-coated	
Number of wires	3	
Diameter wires	1,0 mm ²	
Cable termination	2m cable with free wire ends	
Max. temperature Tc	85 ° C	
Max. ambient temperature Ta	-20 ° C ~ +40 ° C	
Lifetime luminaire L80	50000 h	
Remarks	rotatable by 360° - swiveling by 180 Color temperature 3000 K or 4000 K selectable via dip switch Lifetime of built-in driver: 50,000 h	

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.

DIMENSIONED DRAWINGS



ACCESSORIES

	62424201	62424006	62424005
Description	Glare shield for garden spotlight 115 mm	Extension tube for garden spotlight	Post bracket for garden spotlight
Material	aluminium		
Colour	black		
Range of temperature	-20 ° C ~ +40 ° C		
Length	65 mm	525 mm	85 mm
Diameter	119 mm	20 mm	190 mm
Remarks	fixation with grub screw	internal cable routing possible via 2 drill holes	diameter adjustable 35-190 mm



	62424005	62424007
Description	Post bracket for garden spotlight	Ground spike for garden spotlight
Material	aluminium	
Colour	black	
Range of temperature	-20 ° C ~ +40 ° C	
Length	85 mm	265 mm
Diameter	190 mm	59 mm
Remarks	diameter adjustable 35-190 mm	can also be used with extension arm



	62424008	62424009
Description	Cable connector for outdoor installations	4-way cable connector for outdoor installations
Material	Polyamid PA6	
Length	130 mm	83 mm
Width		54 mm
Height		28 mm
Diameter	36 mm	
Remarks	connection via screw terminals, 5 x 0.25-2.5 mm ²	connection via screw terminals, 4 x 0.5-1.5 mm ²

