

# CEVO Downlight - 13 W - EBD 100 mm

- high quality downlight with matt, powder-coated surfaces for various applications from shop to private use
- housing closed on the inside prevents the flash through the substructure or the ceiling
- LED offset to the rear ensures high lighting quality and low glare
- Downlight can be tilted 30° and rotated 360°
- Colour temperatures: 2700 K and 4000 K; other light colours on request
- Beam angle: 33°; 22° on request available with MOQ 100 pieces
- also available without driver or with 2 other driver variants



## LIGHT DATA

	624933273	624933403
Color of body	black	
	624633274	624633404
Version	with driver HEP, dimmable via phase angle control or phase cut	
Color of body	white	
Typ. color temperature	2700 K	4000 K
Light color	warm white	cold white
Typ. luminous flux	1127 lm	1283 lm
Efficiency	87 lm/W	99 lm/W
Energy efficiency class	A+	
Typ. color rendering index	>80	
SDCM MacAdam	3	
Beam angle	33 °	

## POWER DATA


	624633274
Operating voltage AC	230 V AC
Typ. power	13 W

## FURTHER DATA


	624633274
Height	92 mm
Diameter	115 mm
Mounting diameter	100 mm
Type of protection	IP 20
Indoor/Outdoor	Indoor
Max. temperature Tc	85 ° C
Max. ambient temperature Ta	25 ° C
Lifetime L80	>30.000 h

Note: These specifications apply to all variants.

## DIMENSIONED DRAWING

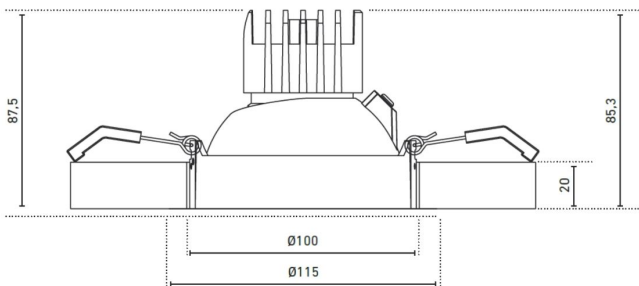

## BEAM ANGLE



## ACCESSORIES

	62440011	62440012	62440013	62440014	62440015
<b>Description</b>	Interchangeable shield white	Interchangeable shield black	Interchangeable shield silver	Interchangeable shield; pinhole black	Interchangeable shield; pinhole white
<b>Material</b>	Plastics				
<b>Colour</b>	white	black	silver	black	white
<b>Height</b>	19 mm			13 mm	
<b>Diameter</b>	93 mm			92 mm	



The guarantee period for the product is 3 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.