

BARI mounted spotlight

700mA - 2,3W

- dimmable, high quality LED spot for indoor applications
- selection of three brushed aluminium housing colours: aluminium, natural anodised; black anodised and white powder-coating
- various configurations for diverse project requirements
- fitted with high quality LEDs from OSRAM
- easy installation with mounting bracket
- pivotable housing enables variable alignment



LIGHT DATA

	62513215	62513226	62513227	62513233	62513515	62513526	62513527	62513533
Color of body	aluminium				schwarz			
Typ. color temperature	5000 K	4000 K	2700 K	3000 K	5000 K	4000 K	2700 K	3000 K
Light color	daylight	cold white	warm white	white	daylight	cold white	warm white	white
Typ. luminous flux	280 lm	260 lm	200 lm		280 lm	260 lm	200 lm	
Efficiency	122 lm/W	113 lm/W	87 lm/W		122 lm/W	113 lm/W	87 lm/W	
EEC of installed light source(s)	F							
Typ. color rendering index	82							
SDCM MacAdam	3							
Beam angle	35 °							
	62513715	62513726	62513727	62513733				
Color of body	weiß							
Typ. color temperature	5000 K	4000 K	2700 K	3000 K				
Light color	daylight	cold white	warm white	white				
Typ. luminous flux	280 lm	260 lm	200 lm					
Efficiency	122 lm/W	113 lm/W	87 lm/W					
EEC of installed light source(s)	F							
Typ. color rendering index	82							
SDCM MacAdam	3							
Beam angle	35 °							


POWER DATA

	62513215
Operating current	700 mA
Constant current range	350 mA;700 mA
Typ. power	2,3 W

FURTHER DATA

	62513215
Length	24 mm
Width	35 mm
Height	46,4 mm
Type of protection	IP 20
Connection	Connector
Cable termination	1m cable with free wire ends
Max. temperature Tc	70 ° C

DIMENSIONED DRAWING

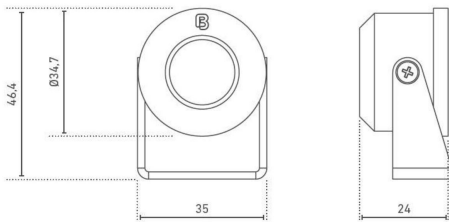

NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.