

MODENA recessed spotlight

700mA - 2,3W

- dimmable, high quality recessed LED ceiling luminaire
- selection of three brushed aluminium housing colours
- fitted with high quality LEDs from OSRAM
- incl. 1 m connection cable with plug



LIGHT DATA

	62514015	62514026	62514027	62514033	62514215	62514226	62514227	62514233
Color of body	aluminium				schwarz			
Typ. color temperature	5000 K	4000 K	2700 K	3000 K	5000 K	4000 K	2700 K	3000 K
Light color	daylight	white	warm white	white	daylight	white	warm white	white
Typ. luminous flux	280 lm	260 lm	200 lm		280 lm	260 lm	200 lm	
Efficiency	122 lm/W	113 lm/W	87 lm/W		122 lm/W	113 lm/W	87 lm/W	
EEC of installed light source(s)	F				-	F		
Typ. color rendering index					82			
SDCM MacAdam					3			
Beam angle					35 °			
Remarks	The above mentioned values are valid for operation with 700 mA.							
	62514415	62514426		62514427		62514433		
Color of body	weiß							
Typ. color temperature	5000 K		4000 K		2700 K		3000 K	
Light color	daylight		cold white		warm white		white	
Typ. luminous flux	280 lm		260 lm		200 lm			
Efficiency	122 lm/W		113 lm/W		87 lm/W			
EEC of installed light source(s)	F							
Typ. color rendering index	82							
SDCM MacAdam	3							
Beam angle	35 °							
Remarks	The above mentioned values are valid for operation with 700 mA.							


POWER DATA

	62514015
Constant current range	350 mA;700 mA
Typ. power	2,3 W

FURTHER DATA

	62514015
Height	21 mm
Diameter	43,5 mm
Mounting diameter	40 mm
Type of protection	IP 20
Material	Aluminium
Finish	anodised
Cable length	1000 mm
Connection	Connector
Max. temperature Tc	70 ° C

DIMENSIONED DRAWING

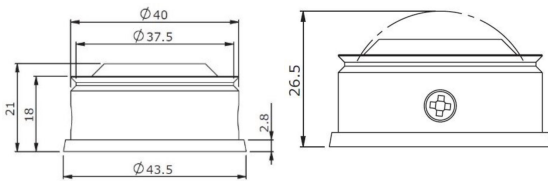

NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.