

# TRIENT recessed spotlight

700mA - 2,3W

- dimmable, high quality recessed LED ceiling / wall luminaire
- brushed anodised aluminium housing



## LIGHT DATA



	62515015	62515026	62515027	62515033	62515215	62515226	62515233	62515267
<b>Color of body</b>	schwarz				aluminium			
<b>Typ. color temperature</b>	5000 K	4000 K	2700 K	3000 K	5000 K	4000 K	3000 K	2700 K
<b>Light color</b>	daylight	cold white	warm white	white	daylight	cold white	white	warm white
<b>Typ. luminous flux</b>	280 lm	260 lm	200 lm		280 lm	260 lm	200 lm	
<b>Efficiency</b>	122 lm/W	113 lm/W	87 lm/W		122 lm/W	113 lm/W	87 lm/W	
<b>EEC of installed light source(s)</b>	-				F			
<b>Typ. color rendering index</b>					82			
<b>SDCM MacAdam</b>					3			
<b>Beam angle</b>					35 °			
	62515815	62515826	62515827	62515833				
<b>Color of body</b>	weiß							
<b>Typ. color temperature</b>	5000 K	4000 K	2700 K	3000 K				
<b>Light color</b>	daylight	cold white	warm white	white				
<b>Typ. luminous flux</b>	280 lm	260 lm	200 lm					
<b>Efficiency</b>	122 lm/W	113 lm/W	87 lm/W					
<b>EEC of installed light source(s)</b>	F				-			
<b>Typ. color rendering index</b>					82			
<b>SDCM MacAdam</b>					3			
<b>Beam angle</b>					35 °			

## POWER DATA


	62515015
<b>Constant current range</b>	350 mA;700 mA
<b>Typ. power</b>	2,3 W

## FURTHER DATA

	62515015
<b>Height</b>	21 mm
<b>Diameter</b>	50 mm
<b>Mounting diameter</b>	43 mm
<b>Type of protection</b>	IP 20
<b>Material</b>	Aluminium
<b>Cable length</b>	1000 mm

	<b>62515015</b>
<b>Connection</b>	Connector
<b>Max. temperature Tc</b>	70 ° C

## DIMENSIONED DRAWING

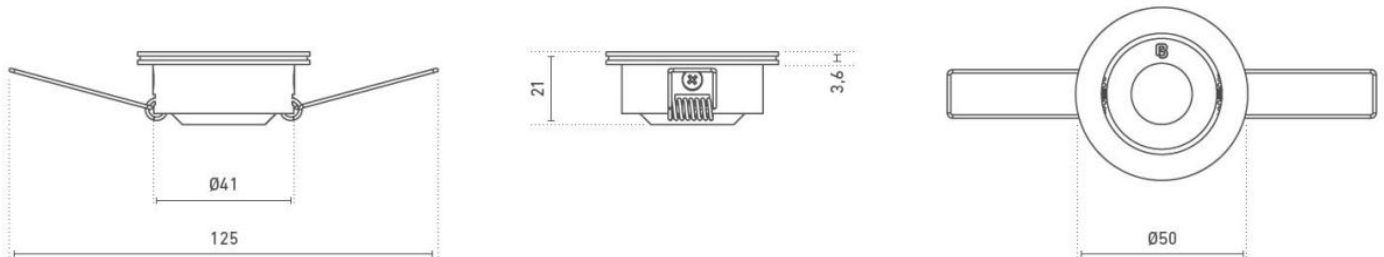

## NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.