

# TRIENT recessed spotlight

8-25VDC - 3W

- dimmable, high quality recessed LED ceiling / wall luminaire
- brushed anodised aluminium housing
- CV version: easily combinable with LED strips in a lighting system (using the same power supply)



## LIGHT DATA

	62515115	62515126	62515127	62515133	62515615	62515626	62515627	62515633
<b>Color of body</b>	aluminium				schwarz			
<b>Typ. color temperature</b>	5000 K	4000 K	2700 K	3000 K	5000 K	4000 K	2700 K	3000 K
<b>Light color</b>	daylight	cold white	warm white	white	daylight	cold white	warm white	white
<b>Typ. luminous flux</b>	280 lm	260 lm	200 lm		280 lm	260 lm	200 lm	
<b>Efficiency</b>	93 lm/W	87 lm/W	67 lm/W		93 lm/W	87 lm/W	67 lm/W	
<b>EEC of installed light source(s)</b>	G							
<b>Typ. color rendering index</b>	82							
<b>SDCM MacAdam</b>	3							
<b>Beam angle</b>	35 °							
	62515915	62515926	62515927	62515933				
<b>Color of body</b>	weiß							
<b>Typ. color temperature</b>	5000 K		4000 K		2700 K		3000 K	
<b>Light color</b>	daylight		cold white		warm white		white	
<b>Typ. luminous flux</b>	280 lm		260 lm		200 lm			
<b>Efficiency</b>	93 lm/W		87 lm/W		67 lm/W			
<b>EEC of installed light source(s)</b>	G							
<b>Typ. color rendering index</b>	82							
<b>SDCM MacAdam</b>	3							
<b>Beam angle</b>	35 °							


## POWER DATA

	62515115
<b>Operating voltage DC</b>	8 V DC-25 V DC
<b>Typ. power</b>	3 W

## FURTHER DATA

	<b>62515115</b>
Height	21 mm
Diameter	50 mm
Mounting diameter	43 mm
Type of protection	IP 20
Material	Aluminium
Cable length	1000 mm
Connection	free wire ends
Cable termination	1 m cable with free wire ends
Max. temperature Tc	70 ° C

## DIMENSIONED DRAWING

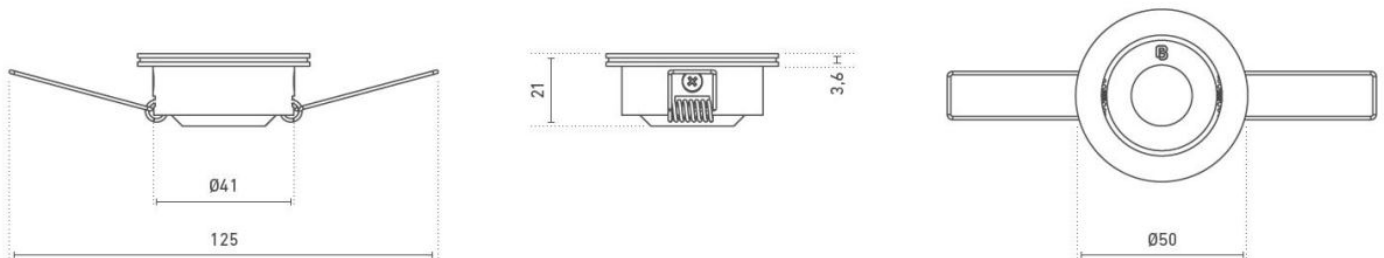

## NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.