

PESCARA recessed spotlight

700mA - 2,3W

- dimmable ceiling /wall luminaire, extra flat
- aluminium housing in stainless steel optic
- 2 designs: pivotable and rigid
- fitted with high quality LEDs from OSRAM
- easy mounting with integrated holding springs



LIGHT DATA

	62524215	62524226	62524227	62524233	62534215	62534226	62534227	62534233
Color of body	aluminium, Edelstahlblende							
Typ. color temperature	5000 K	4000 K	2700 K	3000 K	5000 K	4000 K	2700 K	3000 K
Light color	daylight	cold white	warm white	white	daylight	cold white	warm white	white
Typ. luminous flux	280 lm	260 lm	200 lm		280 lm	260 lm	200 lm	
Efficiency	122 lm/W	113 lm/W	87 lm/W		122 lm/W	113 lm/W	87 lm/W	
EEC of installed light source(s)	F							-
Typ. color rendering index	82							
SDCM MacAdam	3							
Beam angle	40 °							
Remarks	rigid				pivotable			


POWER DATA

	62524215	62524226	62524227	62524233	62534215	62534226	62534227	62534233
Operating current	700 mA							
Constant current range	350 mA;700 mA							
Typ. power	2,3 W							

FURTHER DATA

	62524215	62524226	62524227	62524233	62534215	62534226	62534227	62534233
Height	21 mm							
Diameter	62 mm							
Mounting diameter	50 mm							
Type of protection	IP 44							
Material	Aluminium							
Cable length	1000 mm							
Connection	Connector							
Max. temperature Tc	70 ° C							

DIMENSIONED DRAWING

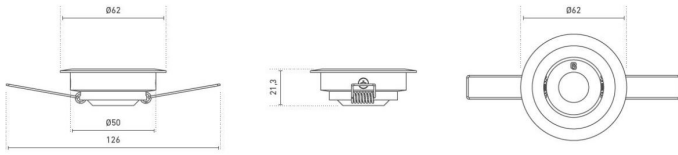

NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.