


# MILANO UGR - pendant luminaire 1126 mm DID

- versatile pendant luminaire with low glare and high quality design
- integrated indirect ceiling illumination
- UGR <16 at intensive 3,580 lm/m for demanding screen workstations
- elegant black powder-coated pendant luminaire (RAL 9005 fine structure) made of aluminum therefore also for retail and general lighting applications
- pendulum length (up to 3,000 mm) can be adjusted individually
- easy connection to 230 V (integrated dimmable Tridonic DALI power supply)
- color temperature 4000 K (standard version), other color temperatures on request
- estimated lifetime L80/B10 at Ta < 55 °C >: > 60,000 h



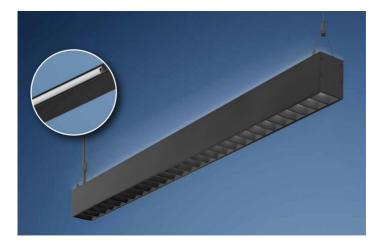

## LIGHT DATA

	62616340
Version	MILANO UGR < 16 230 V PENDANT LUMINAIRE DID 1126 mm
Typ. color temperature	4000 K
Light color	cold white
Typ. luminous flux	3593 lm
Efficiency	76 lm/W
EEC of installed light source(s)	F
Typ. color rendering index	85
SDCM MacAdam	3

### **POWER DATA**


	62616340
Operating voltage	230 V AC
Current consumption	200 mA
Typ. power	47 W



# FURTHER DATA

	62616340
Color of material	black
Type of protection	IP 20
Indoor/Outdoor	Indoor
Ambient temperature Ta max	55 ° C
Length	1126 mm
Width	44 mm
Height	68 mm
Weight	3100 gr
Remarks	UGR <16 (Unified Glare Rating) Integrated dimmable Tridonic DALI power supply unit

### DIMENSIONED DRAWING

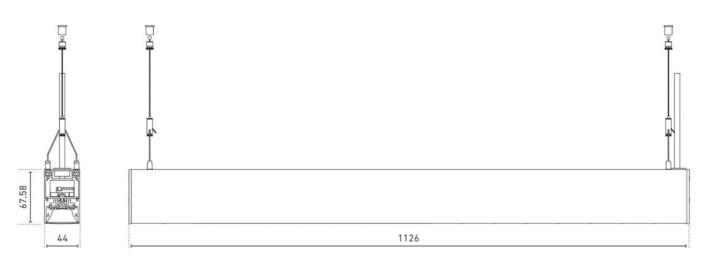

## NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.