

# Pisa MIDI Ground Recessed Luminaire

- dimmable, high quality LED spot for outdoor applications
- milled aluminium housing, anodised - with either aluminium or 316L stainless steel shield
- with integrated membrane for prevention of condensation and contamination through pressure compensation
- low voltage drop due to 48 V operation enables longer cable routings
- fitted with high quality power LEDs from OSRAM
- optional with honeycomb mesh for lateral glare suppression
- water-protected connection of the on-site supply cable within the luminaire via terminal blocks



Please observe the installation and safety instructions at <https://www.barthelme.de/content/en/manuals.aspx> !



## LIGHT DATA

	62772810	62772820	62772835	62773310	62773320	62773335	62772610	62772620	62772635
Typ. color temperature	2700 K			3000 K			4000 K		
Light color	warm white			white			cold white		
Typ. luminous flux	595 lm			629 lm					
Efficiency	96 lm/W			102 lm/W					
Energy efficiency class	A+								
Typ. color rendering index	82								
Beam angle	10 °	20 °	35 °	10 °	20 °	35 °	10 °	20 °	35 °


## POWER DATA

	62772610
Operating voltage	48 V DC
Operating voltage	
Typ. power	6,3 W

## FURTHER DATA

	62772610
Height	115,2 mm
Mounting diameter	72 mm
Max. temperature Tc	59 ° C
Lifetime L70	>36000 h
Load capacity	1000 kg
Material shield	V4A-Edelstahl

## DIMENSIONED DRAWING

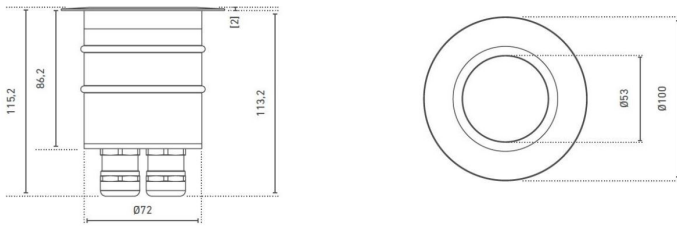

## ACCESSORIES

	<b>62700078</b>	<b>62700122</b>
<b>Description</b>	honeycomb mesh for lateral glare suppression, aluminium, anodised, black, fitted prior to delivery	ground mounting sleeve, aluminum, Ø 80 mm, length 150 mm
<b>Material</b>	Aluminium	



## NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 3 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.