


Connecting clamp with cutting contacts

- for cable diameter 0,2 ~ 0,5 mm²
- no need to remove wire insulation
- no need to splice the wires
- no need for taping
- Water and dust resistant (IP 33)
- for solid or stranded cables



	65000021	65000022	65000023
Description	connecting clamp, for easy connecting of 2 cables	connecting clamp, for easy connecting of 2x2 cables	connection clamp, for simple looping of a cable
Max. operating current		3 A	
Wire cross-section		0,2-0,5 mm ²	
Type of protection		IP 33	
Length	25 mm	18 mm	25 mm
Width	5,5 mm	8,5 mm	14 mm
Height		5,5 mm	
Weight	0,8 gr	1,5 gr	1,0 gr
Remarks		max. operating voltage: 600 V DC Contact resistance: 0,0018Ω	

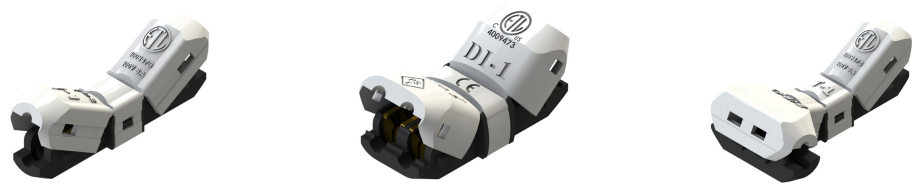