


CHROMOFLEX PRO Remote Control

Black Edition

- up to four light zones can be individually controlled
- Real glass surface with capacitive keys and pleasant feel
- round, dynamic slider with RGBW-LED as status display for adjusting color, color temperature and luminous intensity
- automatic activation or deactivation by integrated G-sensor
- integrated rechargeable battery with a very long runtime of several months at normal use
- with USB type C socket
- four freely assignable keys

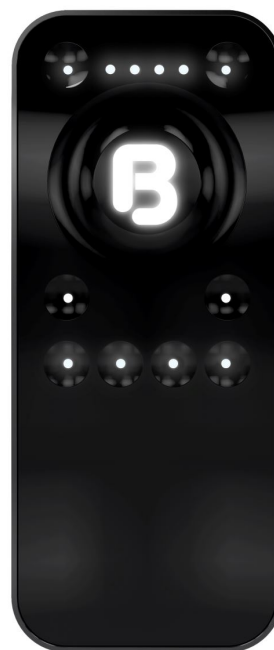

TECHNICAL DATA

	66000029
Product	Remote Control for up to four lightzones, dynamic slider with RGBW-LED as status display
Operating voltage DC	3,7 V DC
Radio frequency	868,3 MHz
Protection class	III
Type of battery	1x 3,7 V DC Akku
Ambient temperature	0 ° C ~ +50 ° C
Length	140 mm
Width	59 mm
Height	13 mm
Weight	45 gr
Remarks	Range in buildings: max. 30 m Max. transmission power: 25 mW The input commands (especially for the slider in the center) must be entered with slow movements over the glass. Movements that are too fast are not recognized by the remote control.

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.