

CHROMOFLEX Stripe

- 3 channel for RGB applications
- programmable via interface cable/software
- controlled via IR-control





Please note the installation- and safety instructions.



	66000050	66000071	66000073
Product	CHROMOFLEX II Stripe CV without encoder/push-button input	CHROMOFLEX II D Stripe CV connection possibility to encoder for a selection of colours and colour programmes	CHROMOFLEX-T Stripe connection possibility to push buttons for a selection of colours and colour programmes
Number of channels	3		
Operating voltage DC	7 V DC~24 V DC		
Output current per channel	2,5 A		
Max. total power	180 W		
Power consumption in standby mode	Psb: max. 0,5 W		
Power consumption in network standby mode	Pnet: max. 0,5 W		
Power consumption in idle mode	not intended for this		
Light source type	suitable for LED		
Efficiency at full load	99 %		
Connection via	screw terminals		
Ambient temperature	0°C ~ +50 ° C		
Max. temperature Tc	+60 ° C		
Length	96 mm		
Width	52 mm		
Height	34 mm		
Weight	90 gr		
Remarks	8 programs + 20 fixed colors Modulation frequency 120-240 Hz		

CONNECTION SCHEMES

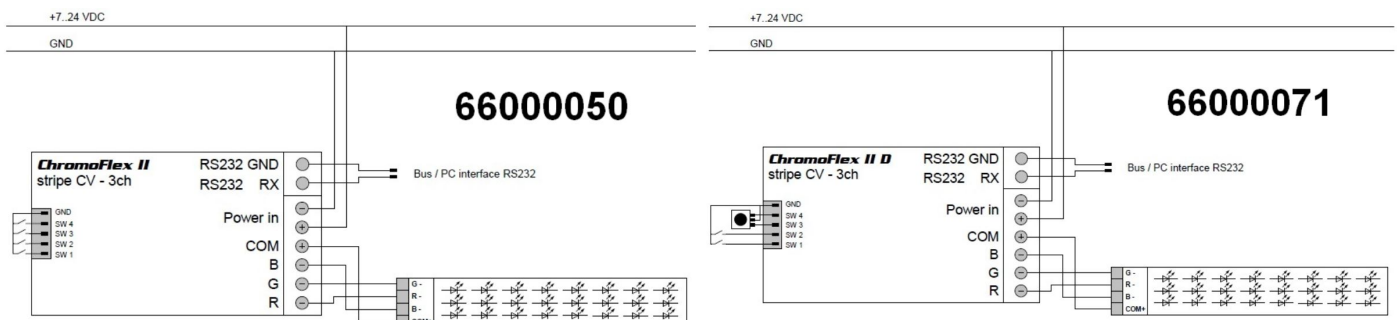

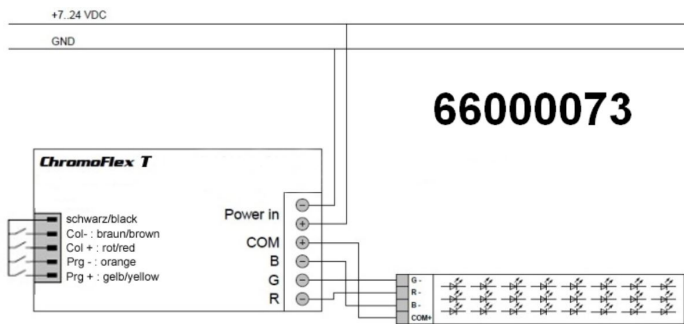

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.

RECOMMENDATION FOR DISPOSAL

Please help to avoid waste. Should you ever wish to part with this item, please remember that many of its components are made of valuable raw materials and can be recycled. Therefore, please do not dispose of it in the dustbin, but please take it to your collection point for electrical appliances. Thank you for your cooperation!

