

CHROMOFLEX Pro DALI i350 | i500 | i700 CC

- 4 channel controllable via DALI, number of channels is configurable
- manual mode with 230 V control possible (only 1 channel solutions)
- input voltage: 10-48 V DC (depending on the load)
- constant current: 350 mA / 500 mA / 700 mA
- 4 controllable channels from monochrome to RGBW/RGBA applications




Please note the installation- and safety instructions.



	66000434
Product	4 channels, from monochrome to RGBW/RGBA, DALI control
Number of channels	4
Operating voltage DC	10 V DC~48 V DC
Output current per channel	350 mA;500 mA;700 mA
Max. total power	96 W
Power consumption in standby mode	Psb: max. 0,5 W
Power consumption in network standby mode	Pnet: max. 0,5 W
Power consumption in idle mode	not intended for this
Light source type	suitable for LED
Efficiency at full load	99 %
Strain relief	Yes
Connection via	screw terminals
Color of body	grau/blau
Length	182 mm
Width	52 mm
Height	23 mm
Weight	145 gr

When using a KNX/DALI gateway, we recommend carrying out preliminary compatibility tests.

CONNECTION SCHEME

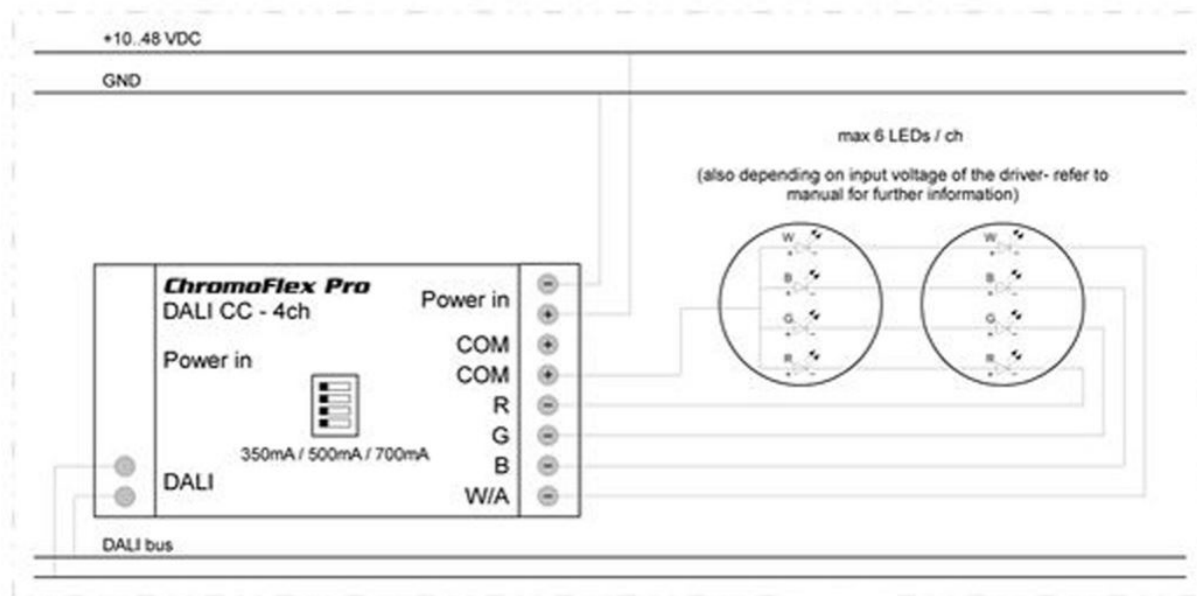

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.

RECOMMENDATION FOR DISPOSAL

Please help to avoid waste. Should you ever wish to part with this item, please remember that many of its components are made of valuable raw materials and can be recycled. Therefore, please do not dispose of it in the dustbin, but please take it to your collection point for electrical appliances. Thank you for your cooperation!

