

LED converter universal DALI - 50W

•350/500/550/650/700/750/850/900/1050mA •48V

- universal converter, 50 W, dimmable via push (AC only), 1-10 V DC & DALI, 9 settings for output current possible
- screw terminal for cable 3-8mm, strain relief
- up to 10 converter can be synchronized (1 master + 9 slave)
- auxiliary output 12V, max. 50mA
- external NTC sensor connectable



OUTPUT

	66004413
Constant voltage/Constant current	CV/CC
Output voltage DC	48 V DC
Output current	350 mA~1050 mA

INPUT

	66004413
Input voltage AC/DC	99~264;170~280
Frequency range	50~60


PROTECTION

	66004413
Type of protection	IP 20

FURTHER DATA

	66004413
Suitable for furniture installation	no
Dimmable via	1-10 V interface;Dimm Push;DALI
Strain relief	Yes
screw terminals	screw terminals
Length	125 mm
Width	79 mm
Height	22 mm
Weight	150 gr
Remarks	Protection against overtemperature, overloads, mains voltage spikes and short circuit

CONNECTION SCHEME

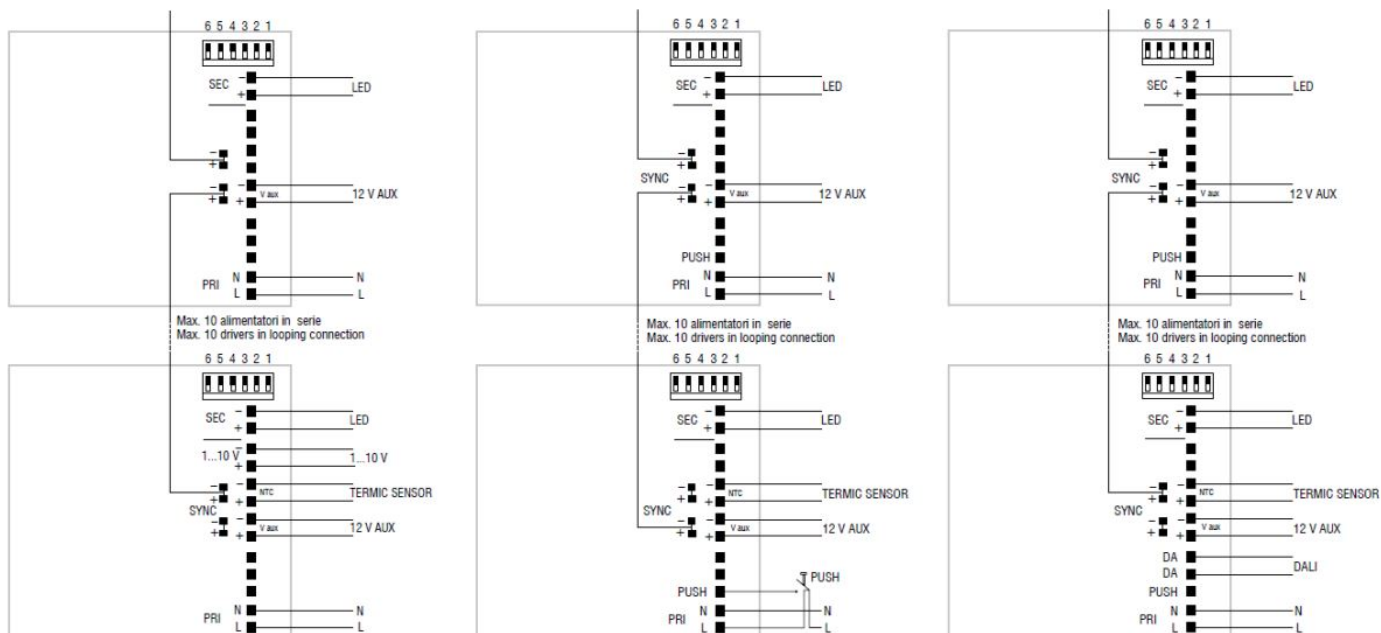

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.