



BERgamo 1.2 - Wallwasher 336 mm - Indoor

Anodised aluminium - RGBW - 3 beam angles

- Elegant wallwasher with high luminous efficacy for architectural area lighting indoors
- Seamless and shadowless stringing possible, several luminaires can be operated with one control unit
- 4-channel linear luminaire, equipped with power LEDs
- rich colours for atmospheric façade lighting
- Indoor: with straight plastic cover - with or without glare protection
- incl. 5 m connection cable with free wire ends

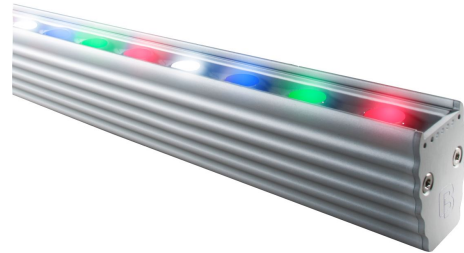

SIDE VIEW OF THE 2 AVAILABLE VARIANTS (WITH CONNECTION CABLE)

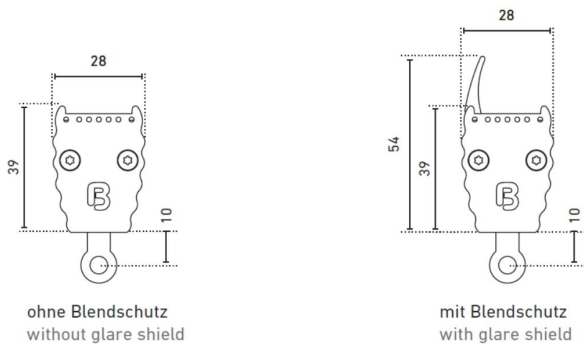

LIGHT DATA

| | 623336172 | 623336352 | 623336502 | 633336172 | 633336352 | 633336502 |
|-------------------------------|--|-----------|-----------|-------------------|-----------|-----------|
| Version | without glare shield with straight cover | | | with glare shield | | |
| dimnable | dimmable | | | | | |
| Typ. color temperature | 4000 K | | | | | |
| Light color | RGBW | | | | | |
| LED beam angle | 17 ° | 35 ° | 50x15 ° | 17 ° | 35 ° | 50x15 ° |
| Typ. luminous flux | 1550 lm | | | | | |
| Efficiency | 53 lm/W | | | | | |
| Number of LEDs | 12 | | | | | |

POWER DATA


| | 623336172 |
|-----------------------------------|-----------|
| Constant voltage/Constant current | CC |
| Operating current | 4x700 mA |
| Typ. power | 29,5 W |
| Lifetime L70 | >60000 h |

FURTHER DATA

| | 623336172 | 633336172 |
|------------------------------|---|-----------|
| Material | aluminium | |
| Finish | anodised | |
| Color of material | aluminium anodised | |
| Type of protection | IP 30 | |
| Indoor/Outdoor | Indoor | |
| Ambient temperature Ta max | 55 ° C | |
| Length | 336 mm | |
| Width | 28 mm | |
| Height | 39 mm | 54 mm |
| Cable length/cable finishing | 5m cable with free wire ends | |
| Remarks | without mounting bracket and cantilever arm | |

Note: The specifications under "Power data" and "Further data" apply to all respective variants.


BEAM ANGLE

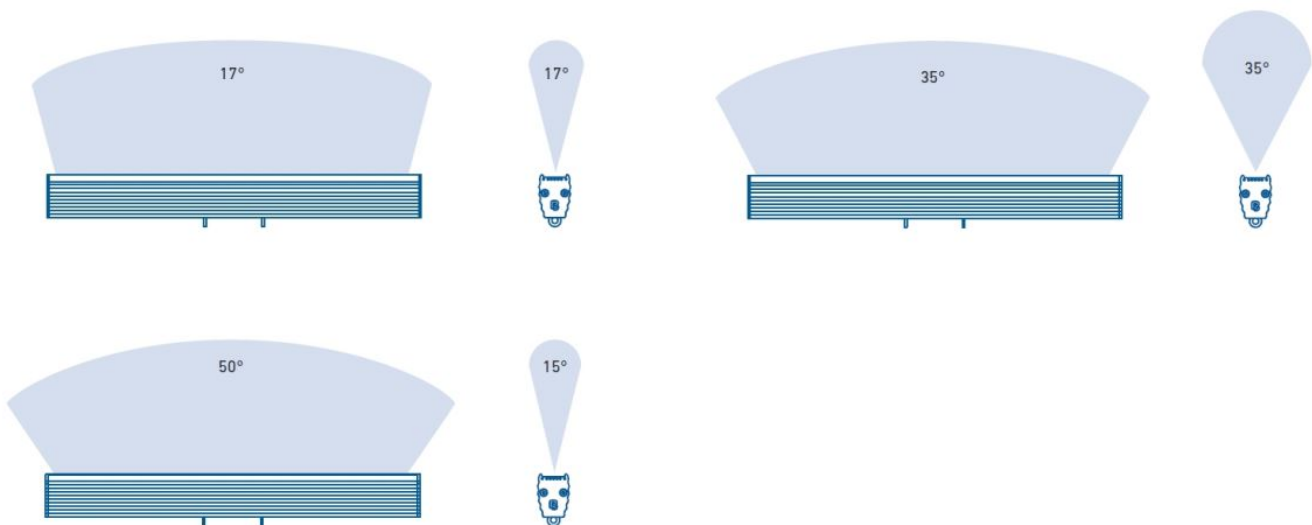

ACCESSORIES

| | 62399487 | 62399488 | 62399489 | 62399490 |
|--------------------|---|--|--|---|
| Description | mounting bracket standard, for mounting in ceiling and floor, incl. 2 screws and 2 dowels, distance to wall 15 mm | cantilever arm, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 65 mm | cantilever arm long, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 201 mm | mounting bracket 90° Bergamo, incl. 2 screws and 2 dowels, distance to wall 20 mm |
| Material | 304 stainless steel | | | |
| Length | 73,7 mm | 71,4 mm | 206,3 mm | 40,6 mm |
| Width | 58 mm | | | |
| Height | 20,4 mm | 55,5 mm | 85,5 mm | 25,4 mm |
| Remarks | Mounting bracket V2A steel, nylon dowel, spacer sleeve brass nickel plated, screws, washers, snorkel washer, nut | | | |

Note: Please use two holders for a luminaire length of 996 mm.

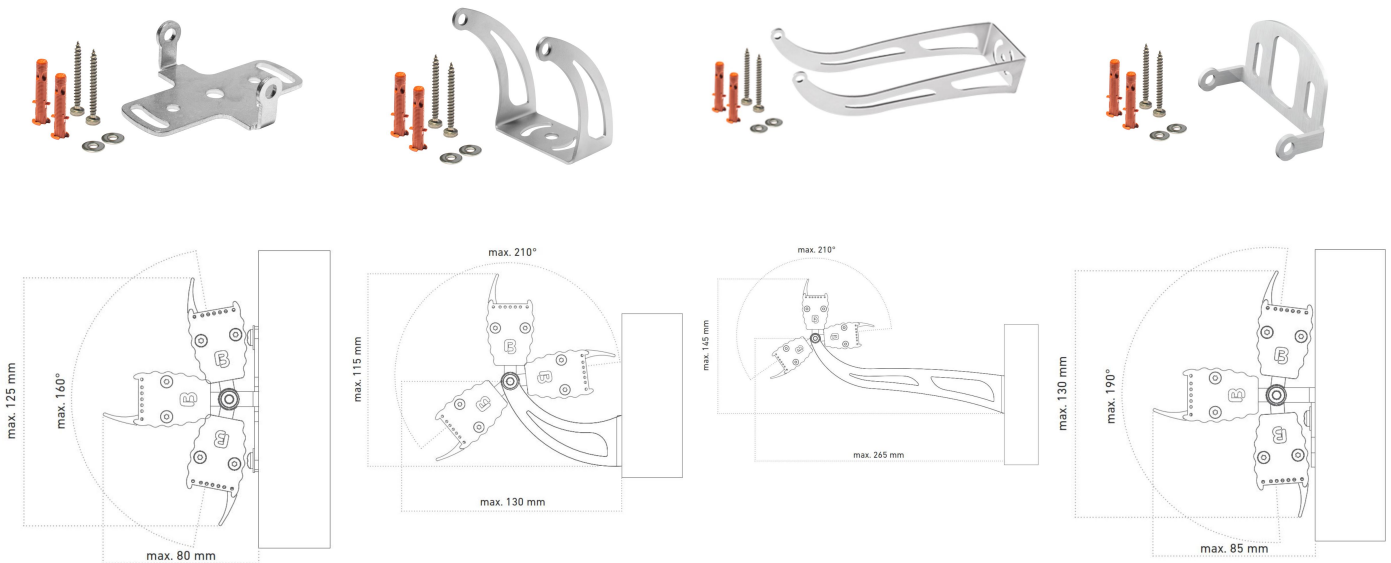

NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.