



# BERgamo 1.2 - Wallwasher 996 mm - Indoor

Anodised aluminium - RGBW - 3 beam angles

- Elegant wallwasher with high luminous efficacy for architectural area lighting indoors
- Seamless and shadowless stringing possible, several luminaires can be operated with one control unit
- 4-channel linear luminaire, 700 mA per channel, equipped with power LEDs
- rich colours for atmospheric façade lighting
- Housing made of anodised aluminium
- Indoor: with straight plastic cover - with or without glare protection
- Available in three lengths with various optics
- incl. 5 m connection cable with free wire ends

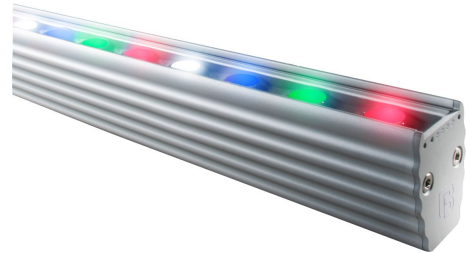

## SIDE VIEW OF THE 2 AVAILABLE VARIANTS (WITH CONNECTION CABLE)

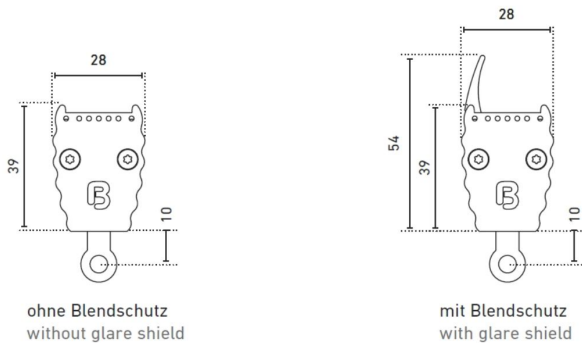

## LIGHT DATA

	629836172	629836352	629836502	639836172	639836352	639836502
<b>Version</b>	without glare shield with straight cover			with glare shield with straight cover		
<b>dimmable</b>	dimmable					
<b>Typ. color temperature</b>	4000 K					
<b>Light color</b>	RGBW					
<b>LED beam angle</b>	17 °	35 °	50x15 °	17 °	35 °	50x15 °
<b>Typ. luminous flux</b>	4650 lm					
<b>Efficiency</b>	53 lm/W					
<b>Number of LEDs</b>	36					

## POWER DATA


	629836172
Constant voltage/Constant current	CC
Operating current	4x700 mA
Typ. power	89 W
Lifetime L70	>60000 h

## FURTHER DATA

	629836172	639836172
Material	aluminium	
Finish	anodised	
Color of material	aluminium anodised	
Type of protection	IP 30	
Indoor/Outdoor	Indoor	
Ambient temperature Ta max	55 ° C	
Length	996 mm	
Width	28 mm	
Height	39 mm	54 mm
Weight	1100 gr	
Cable length/cable finishing	5m cable with free wire ends	
Remarks	without mounting bracket and cantilever arm	

Note: The specifications under "Power data" and "Further data" apply to all respective variants.


## BEAM ANGLE

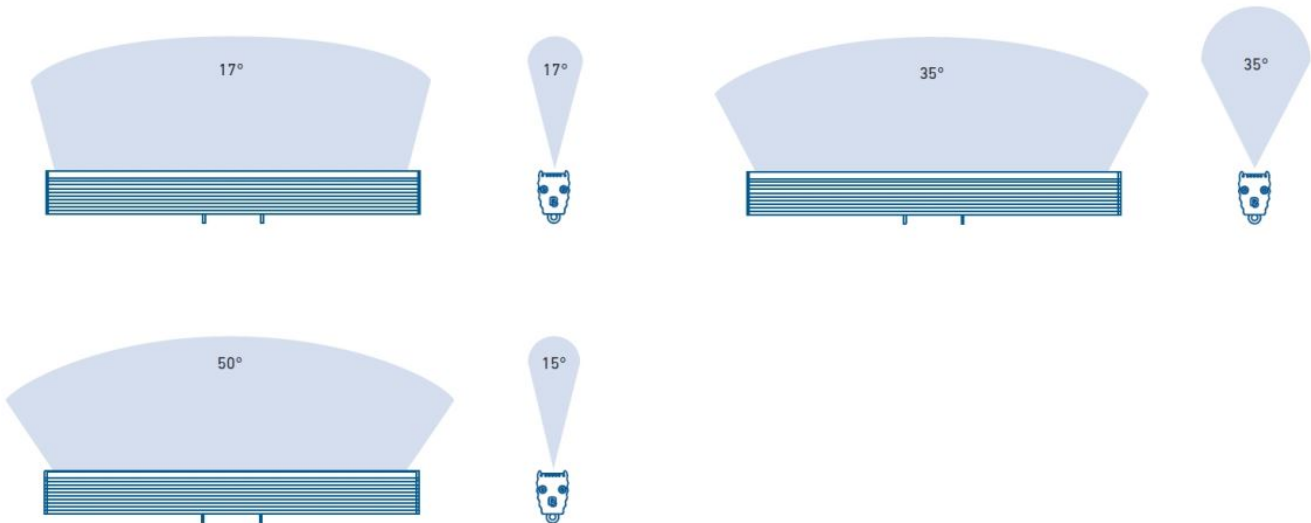

## ACCESSORIES

	62399487	62399488	62399489	62399490
<b>Description</b>	mounting bracket standard, for mounting in ceiling and floor, incl. 2 screws and 2 dowels, distance to wall 15 mm	cantilever arm, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 65 mm	cantilever arm long, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 201 mm	mounting bracket 90° Bergamo, incl. 2 screws and 2 dowels, distance to wall 20 mm
<b>Material</b>	304 stainless steel			
<b>Length</b>	73,7 mm	71,4 mm	206,3 mm	40,6 mm
<b>Width</b>	58 mm			
<b>Height</b>	20,4 mm	55,5 mm	85,5 mm	25,4 mm
<b>Remarks</b>	Mounting bracket V2A steel, nylon dowel, spacer sleeve brass nickel plated, screws, washers, snorkel washer, nut			

Note: Please use two holders for a luminaire length of 996 mm.

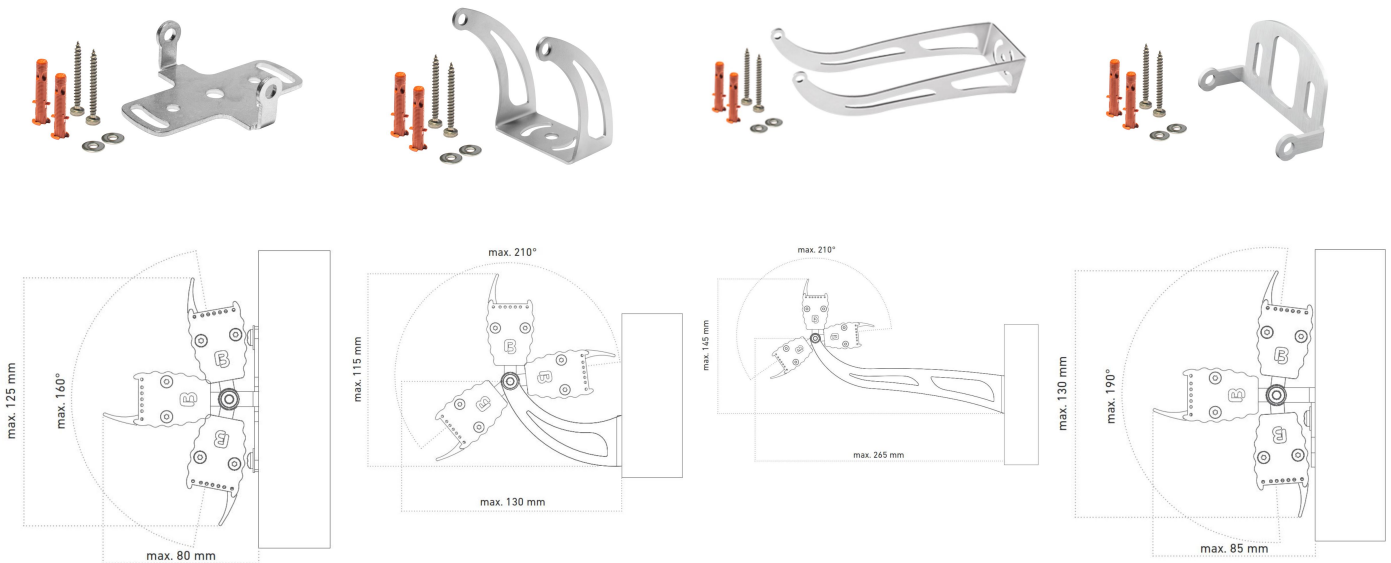

## NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.