


# BERgamo 1.2 - Wallwasher 996 mm - Indoor

## anodised aluminium - 3 white tones - 3 beam angles

- elegant wallwasher with high lumen output for indoor and outdoor architectural area illumination
- seamless and shadowless alignment possible, several luminaires operable with one controller
- temperature monitoring, automatic dimming of the LEDs in the case of overheating to protect from damage
- anodised aluminium housing - coloured anodised on request
- indoor luminaire with or without glare shield



### SIDE VIEW OF THE 2 AVAILABLE VARIANTS (WITH CONNECTION CABLE)

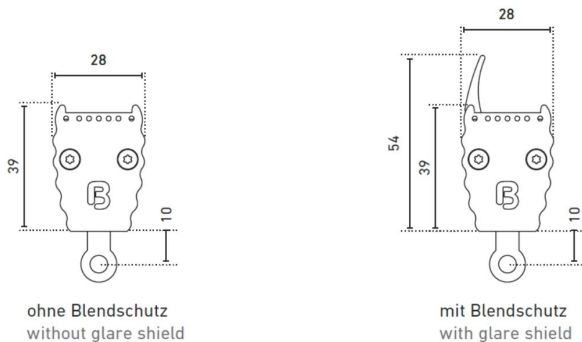

### LIGHT DATA

	639827172	639827352	639827502	639830172	639830352	639830502
Version	with glare shield with straight cover					
dimmmable	dimmmable					
	629827172	629827352	629827502	629830172	629830352	629830502
Version	without glare shield with straight cover					
Typ. color temperature	2700 K			3000 K		
Light color	warm white			white		
LED beam angle	17 °	35 °	50x15 °	17 °	35 °	50x15 °
Typ. luminous flux	5340 lm			5640 lm		
Efficiency	99 lm/W			104 lm/W		
EEC of installed light source(s)	F					
Typ. color rendering index	83					
SDCM MacAdam	3					
Number of LEDs	36					

	639840172	639840352	639840502
Version	with glare shield with straight cover		
dimnable	dimmable		
	629840172	629840352	629840502
Version	without glare shield with straight cover		
Typ. color temperature	4000 K		
Light color	cold white		
LED beam angle	17 °	35 °	50x15 °
Typ. luminous flux	5940 lm		
Efficiency	110 lm/W		
EEC of installed light source(s)	F		
Typ. color rendering index	83		
SDCM MacAdam	3		
Number of LEDs	36		

## POWER DATA


	629827172
Constant voltage/Constant current	CV
Operating voltage	24 V DC
Typ. power	54 W
Lifetime L70	>60000 h

## FURTHER DATA

	629827172	639827172
Material	aluminium	
Finish	anodised	
Color of material	aluminium	
Type of protection	IP 30	
Indoor/Outdoor	Indoor	
Ambient temperature Ta max	55 ° C	
Length	996 mm	
Width	28 mm	
Height	39 mm	54 mm
Weight	1100 gr	1230 gr
Cable length/cable finishing	5m cable with free wire ends	
Remarks	without mounting bracket and cantilever arm	

Note: The specifications under "Power data" and "Further data" apply to all respective variants.


## BEAM ANGLE

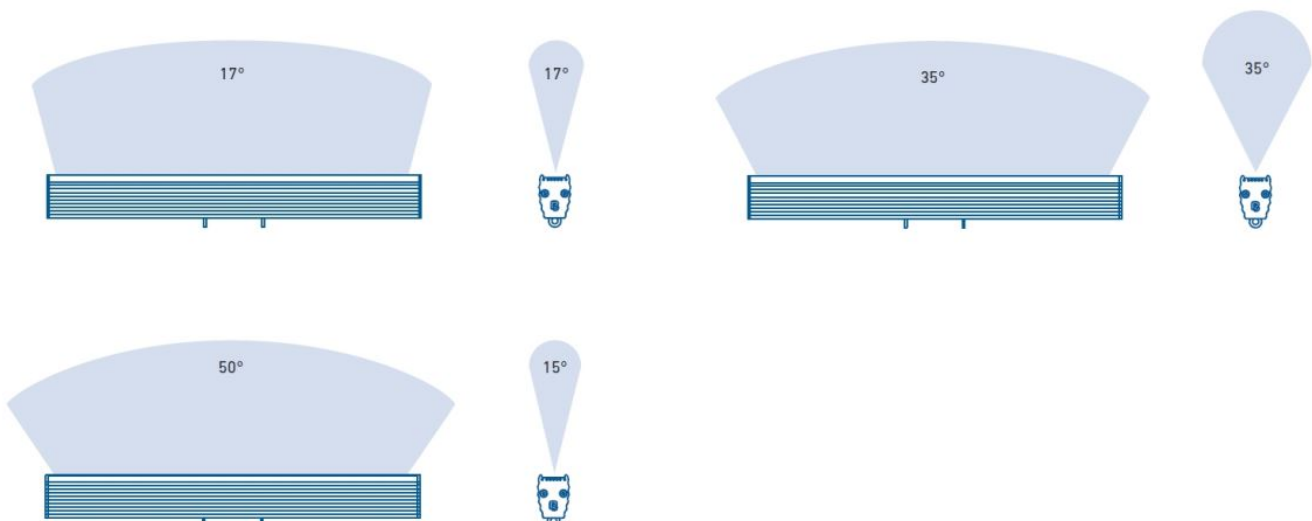

## ACCESSORIES

	62399487	62399488	62399489	62399490
<b>Description</b>	mounting bracket standard, for mounting in ceiling and floor, incl. 2 screws and 2 dowels, distance to wall 15 mm	cantilever arm, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 65 mm	cantilever arm long, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 201 mm	Mounting bracket 90° Bergamo, incl. 2 screws and 2 dowels, distance to wall 20 mm
<b>Material</b>	304 stainless steel			
<b>Length</b>	73,7 mm	71,4 mm	206,3 mm	40,6 mm
<b>Width</b>	58 mm			
<b>Height</b>	20,4 mm	55,5 mm	85,5 mm	25,4 mm
<b>Remarks</b>	Mounting bracket V2A steel, nylon dowel, spacer sleeve brass nickel plated, screws, washers, snorkel washer, nut			

Note: Please use two holders for a luminaire length of 996 mm.

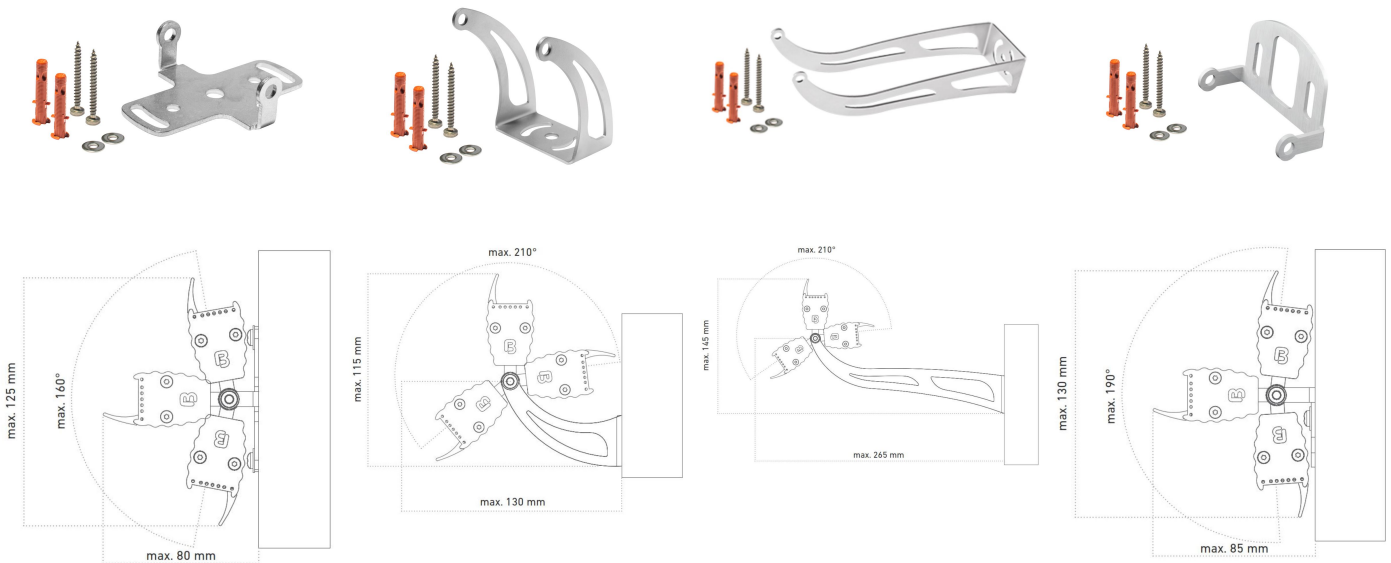

## NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.