


# BERgamo 1.2 - Wallwasher 996 mm - Outdoor

anodised aluminium - 3 white tones - 3 beam angles

- elegant wallwasher with high lumen output for indoor and outdoor architectural area illumination
- seamless and shadowless alignment possible, several luminaires operable with one controller
- temperature monitoring, automatic dimming of the LEDs in the case of overheating to protect from damage
- impact resistance: IK10 (without glare shield)
- anodised aluminium housing - coloured anodised on request
- outdoor luminaire with or without glare shield



## SIDE VIEW OF THE 2 AVAILABLE VARIANTS (WITH CONNECTION CABLE)

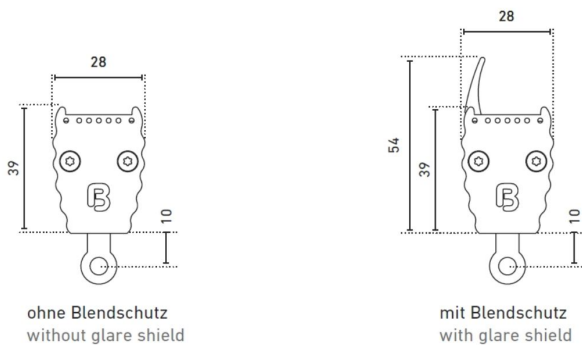

## LIGHT DATA

	639927172	639927352	639927502	639930172	639930352	639930502
<b>Version</b>	with glare shield					
<b>dimmmable</b>	dimmmable					
	629927172	629927352	629927502	629930172	629930352	629930502
<b>Version</b>	without glare shield with straight cover					
<b>Typ. color temperature</b>	2700 K			3000 K		
<b>Light color</b>	warm white			white		
<b>LED beam angle</b>	17 °	35 °	50x15 °	17 °	35 °	50x15 °
<b>Typ. luminous flux</b>	5340 lm			5640 lm		
<b>Efficiency</b>	99 lm/W			104 lm/W		
<b>EEC of installed light source(s)</b>	F					
<b>Typ. color rendering index</b>	83					
<b>SDCM MacAdam</b>	3					
<b>Number of LEDs</b>	36					

	639940172	639940352	639940502
Version	with glare shield		
dimnable	dimmable		
	629940172	629940352	629940502
Version	without glare shield with straight cover		
Typ. color temperature	4000 K		
Light color	cold white		
LED beam angle	17 °	35 °	50x15 °
Typ. luminous flux	5940 lm		
Efficiency	110 lm/W		
EEC of installed light source(s)	F		
Typ. color rendering index	83		
SDCM MacAdam	3		
Number of LEDs	36		

## POWER DATA


	629927172
Constant voltage/Constant current	CV
Operating voltage	24 V DC
Typ. power	54 W
Lifetime L70	>60000 h

## FURTHER DATA

	629927172	639927172
Material	aluminium	
Finish	anodised	
Color of material	aluminium	
Type of protection	IP 67	
Indoor/Outdoor	Outdoor	
Ambient temperature Ta max	55 ° C	
Length	996 mm	
Width	28 mm	
Height	39 mm	54 mm
Weight	1100 gr	1230 gr
Cable length/cable finishing	5m cable with free wire ends	
Remarks	Impact resistance: IK10 without mounting bracket and cantilever arm	without mounting bracket and cantilever arm

Note: The specifications under "Power data" and "Further data" apply to all respective variants.


## BEAM ANGLE

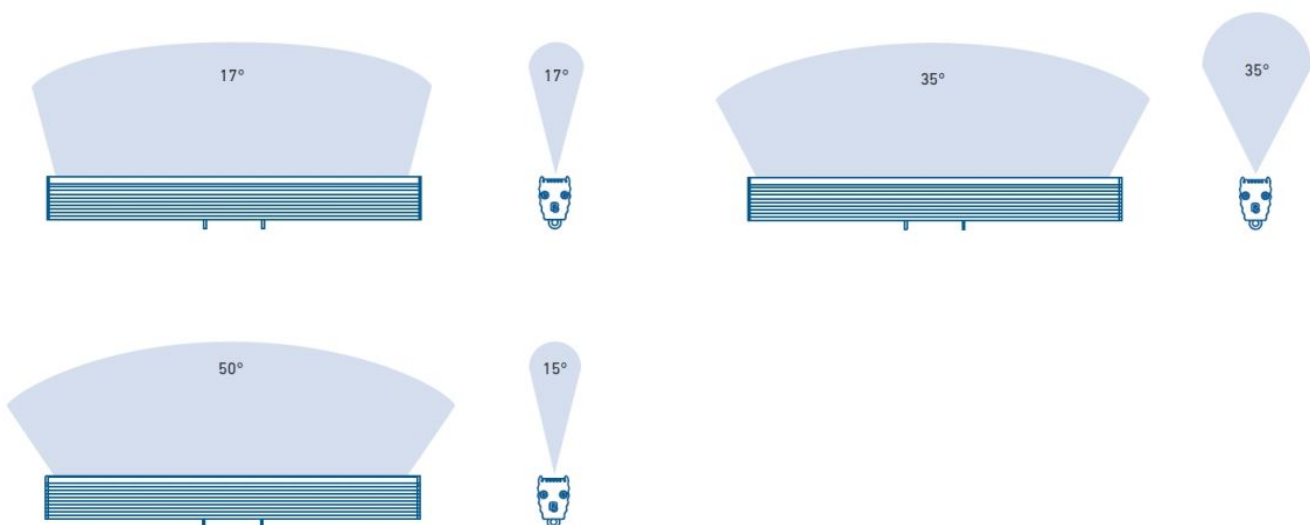

## ACCESSORIES

	62399487	62399488	62399489	62399490
<b>Description</b>	mounting bracket standard, for mounting in ceiling and floor, incl. 2 screws and 2 dowels, distance to wall 15 mm	cantilever arm, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 65 mm	cantilever arm long, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 201 mm	Mounting bracket 90° Bergamo, incl. 2 screws and 2 dowels, distance to wall 20 mm
<b>Material</b>	304 stainless steel			
<b>Length</b>	73,7 mm	71,4 mm	206,3 mm	40,6 mm
<b>Width</b>	58 mm			
<b>Height</b>	20,4 mm	55,5 mm	85,5 mm	25,4 mm
<b>Remarks</b>	Mounting bracket V2A steel, nylon dowel, spacer sleeve brass nickel plated, screws, washers, snorkel washer, nut			

Note: Please use two holders for a luminaire length of 996 mm.

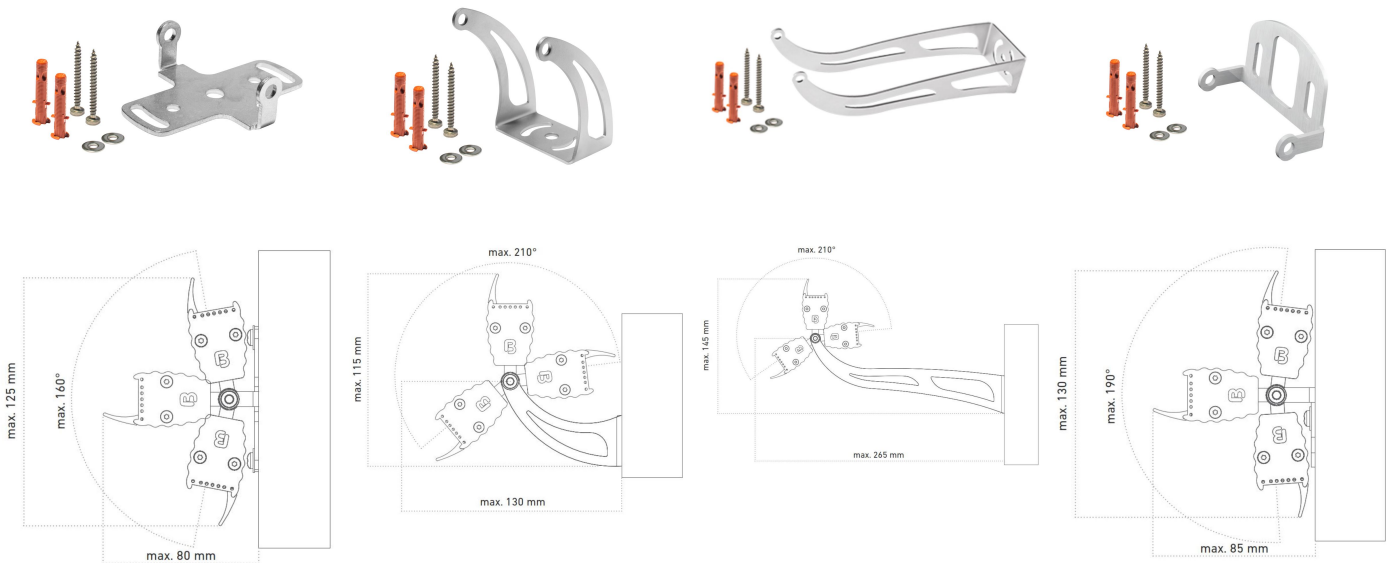

## NOTE

In the case of series-produced items, the dimensions, weights and designs specified in catalogs etc. are subject to standard commercial and reasonable tolerances of series production. These deviations do not constitute a defect. Even minor deviations in size, color and surface as well as technical modifications shall not be considered a defect. Warranted properties shall only apply if they have been confirmed by us in writing.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.