

AQUALUC C:URVE mini Accessories

You have various possibilities to secure the AQUALUC. Either with support profiles for linear lines or using retaining brackets, double-sided adhesive tape or construction glue for flexible installations.


Please observe the installation and safety instructions at <https://www.barthelme.de/content/en/manuals.aspx> !

ACCESSORIES


	40500043	40500044	40500081	40500082
Description	AQUALUC C:URVE mini mounting profile, aluminium, anodised		AQUALUC C:URVE mini mounting profile, PC plastic, UV resistant	
Material	Aluminium		Plastics	
Length	1000 mm	2000 mm	1000 mm	2000 mm
Width	9,7 mm			
Height	12,7 mm		12,8 mm	



	30033019	40100112	40500045	63500024	63500033
Description	heat resistant double-sided tape, with excellent adhesive properties	dismounting tool, minimizes the mechanical stress on the product when removing	AQUALUC C:URVE mini bracket set, 10 pieces stainless steel 316L, 10 screws, 10 dowels	Technical Vaseline, high purity, chemically neutral, 80 g tube, suitable for all mounting profiles	Silicone adhesive and sealant, one-component, transparent, cartridge 290 ml
Material	Acryl	Plastics	316L stainless steel		
Length	33000 mm	210 mm	15 mm		
Width	9 mm	6 mm	7 mm		
Height	0,4 mm	62 mm	11,7 mm		
Remarks	33 m x 9 mm		Diameter hole: 4 mm	For the assembly of the AQUALUC absolutely recommended	not suitable for PC-plastic profiles



DIMENSIONED DRAWINGS

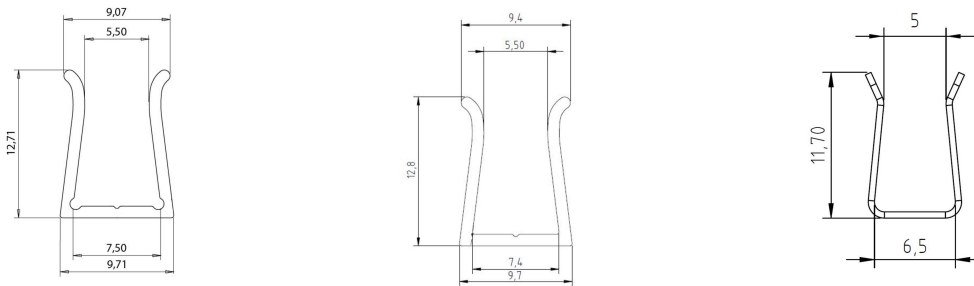

NOTE

Press marks or slight scratches on profiles are production-related and do not constitute a defect.