

CHROMOFLEX Pro KNX stripe ECO CV 4-channel (DIN rail)

- number of channels is configurable via ETS; compatibility from ETS4
- optimised settings, especially for „Tunable White“ applications
- input voltage: 10-48 V DC (depending on the load)
- com+ common anode
- short-circuit-proof
- 4 controllable channels from monochrome to RGBW/RGBA
- energy efficient due to switching off of the primary side via integrated relays as soon as no channel is in use
- more power then the CHROMOFLEX Pro KNX stripe




Please note the installation- and safety instructions.



	66000384
Product	4 channel for RGBW/RGBA applications, KNX control, for DIN rail
Number of channels	4
Operating voltage DC	10 V DC~48 V DC
Output current per channel	4,4 A
Max. total power	422 W
Power consumption in standby mode	Psb: max. 0,5 W
Power consumption in network standby mode	Pnet: max. 0,5 W
Power consumption in idle mode	not intended for this
Light source type	suitable for LED
Efficiency at full load	99 %
Connection via	screw terminals
Length	91 mm
Width	71,5 mm
Height	62 mm
Weight	157,6 gr
Remarks	com+ common anode Output current per channel at 48 V: 2,2 A

CONNECTION SCHEME

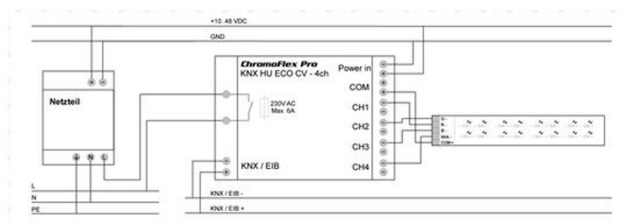

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.

RECOMMENDATION FOR DISPOSAL

Please help to avoid waste. Should you ever wish to part with this item, please remember that many of its components are made of valuable raw materials and can be recycled. Therefore, please do not dispose of it in the dustbin, but please take it to your collection point for electrical appliances. Thank you for your cooperation!

