




BERgamo HP

Linear Luminaire - anodised aluminium - Light colour white -
Length 996mm - Outdoor

- elegant wallwasher with high lumen output for indoor and outdoor architectural area illumination
- seamless and shadowless alignment possible, several luminaires operable with one controller
- Impact resistance: IK10
- Temperature monitoring. Automatic dimming of the LEDs in the case of overheating to protect from damage
- anodised aluminium housing, coloured eloxal on request
- outdoor: high end full encapsulation for excellent protection (IP 67/68*)

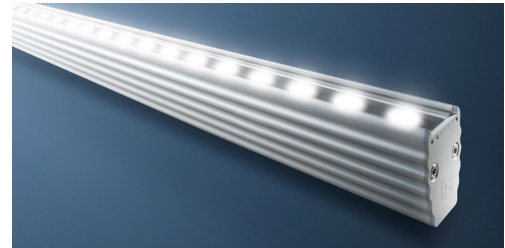

LATERAL VIEW OF THE TWO VARIETIES



LIGHT DATA

	62992817	62992826	62992837	62992855	62993317	62993326	62993337	62993355
Version	ohne Blendschutz							
dimmable	dimmable							
	63992817	63992826	63992837	63992855	63993317	63993326	63993337	63993355
Version	mit Blendschutz							
Typ. color temperature	2700 K				3000 K			
Light color	warm white				white			
LED beam angle	17 °	26 °	37 °	43x16 °	17 °	26 °	37 °	43x16 °
Typ. luminous flux	5340 lm				5640 lm			
Efficiency	99 lm/W				104 lm/W			
Energy efficiency class	A+							
Typ. color rendering index	83							
SDCM MacAdam	3							
Number of LEDs	36							

	62992617	62992626	62992637	62992655
Version	ohne Blendschutz			
dimmable	dimmable			
	63992617	63992626	63992637	63992655
Version	mit Blendschutz			

	63992617	63992626	63992637	63992655
Typ. color temperature	4000 K			
Light color	cold white			
LED beam angle	17 °	26 °	37 °	43x16 °
Typ. luminous flux	5940 lm			
Efficiency	110 lm/W			
Energy efficiency class	A+			
Typ. color rendering index	83			
SDCM MacAdam	3			
Number of LEDs	36			

POWER DATA

	62992617
Constant voltage/Constant current	CV
Operating voltage	24 V DC
Typ. power	54 W
Lifetime L70	>60000 h


FURTHER DATA

	62992617	63992617
dimable	dimable	
Material	Aluminium	
Finish	anodised	
Color of material	aluminium eloxiert	aluminium
Type of protection	IP 67;IP 68	
Indoor/Outdoor	Outdoor	
Umgebungstemperatur Ta max	55 ° C	
Length	996 mm	
Width	28 mm	
Height	39 mm	54 mm
Weight	1100 gr	1230 gr
Cable length/cable finishing	5m cable with free wire ends	
Remarks	Impact resistance: IK10 without mounting bracket and cantilever arm	

Note: The specifications under "Power data" and "Further data" apply to all respective variants.

Maximum values at Ta=25°C

BEAM ANGLE

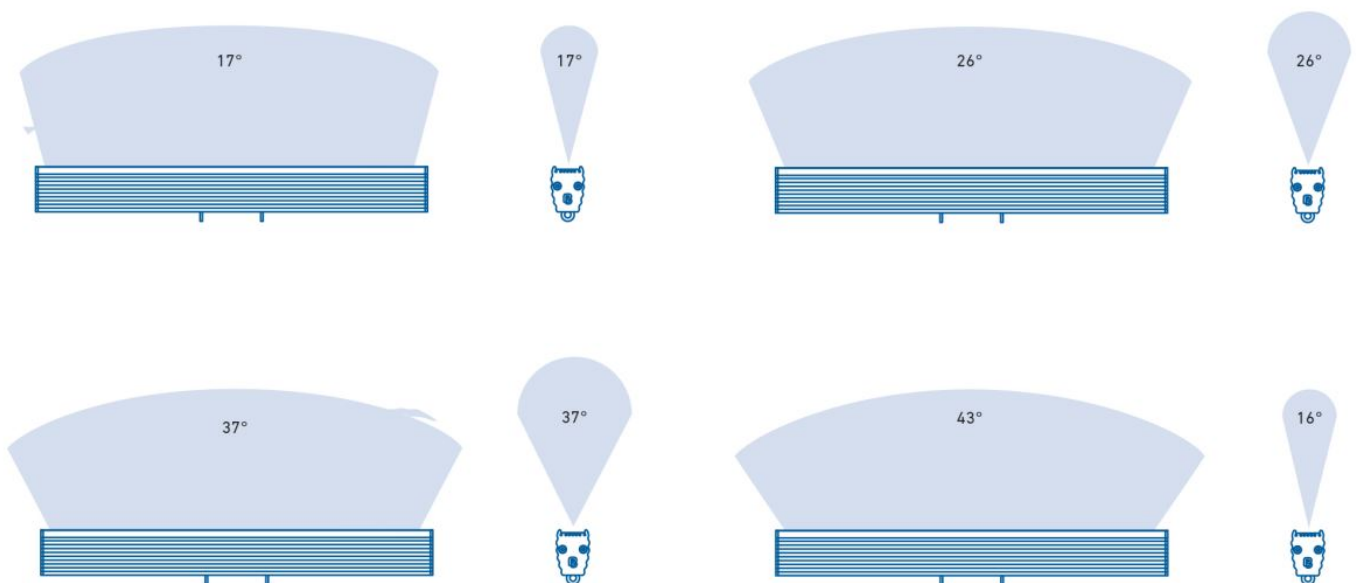

ACCESSORIES

	62399487	62399488	62399489	62399490
Description	mounting bracket standard, for mounting in ceiling and floor, incl. 2 screws and 2 dowels, distance to wall 15 mm	cantilever arm, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 65 mm	cantilever arm long, for mounting on walls, incl. 2 screws and 2 dowels, distance to wall 201 mm	Mounting bracket 90° Bergamo, incl. 2 screws and 2 dowels, distance to wall 20 mm
Material	304 stainless steel			
Length	73,7 mm	71,4 mm	206,3 mm	40,6 mm
Width	58 mm			
Height	20,4 mm	55,5 mm	85,5 mm	25,4 mm
Remarks	Mounting bracket V2A steel, nylon dowel, spacer sleeve brass nickel plated, screws, washers, snorkel washer, nut			



*Tested by TÜV Rheinland on 03.2013 - Test specification: EN60598-1: 2008 + A11: 2009

Test conditions: water depth 5 m/testing time 60 min.

When planning to use the luminaire with continuous immersion, ambient conditions must be previously defined between manufacturer and user!

The guarantee period for the product is 5 years and begins on the day of shipment.

Reference is the date of the delivery bill. The guarantee period may differ for accessories.