ROTONDO

SIGNAL- UND MASCHINENLEUCHTE
SIGNAL AND MACHINE LIGHT

» vollvergossene Rundumleuchte mit Schutzart IP 67
» ideal als Orientierungsleuchte-, Not-, und Signalleuchte für Aufzüge und maschinelle Anwendungen geeignet
» zuverlässiger Schutz vor Feuchtigkeit, Vibrationen, Staub und Schmutz
» stoßfest durch robusten Aufbau
» wärmeleitender Verguss aus Polyurethan-Keramik-Verbindung
» standardmäßig mit klarem Verguss, auf Anfrage auch mit opalem Verguss
» verschiedene Lichtfarben auf Anfrage erhältlich
» wartungsfreier Betrieb
» Lebensdauerabschätzung L70 bei Ta < 45 °C: > 60.000 h

» fully encapsulated all round luminaire with protection class IP 67
» ideal as orientation light, emergency and signal lamp for lifts and machine applications
» reliable protection against moisture, vibration, dust and dirt
» shockproof due to robust construction
» heat-conducting encapsulation made of polyurethane-ceramic-compound
» clear encapsulation as standard, on request also with opal encapsulation
» different white color temperatures available on request
» maintenance-free operation
» estimated lifetime L70 at Ta < 45 °C: > 60,000 h



NEW

ROTONDO

ABMESSUNGEN | DIMENSIONS: 74 x 10 x 40 mm (inkl. Halteklammer | incl. supporting bracket)

CV | 24 VDC | 1W | PITCH 8 | 120° | DIMM | 1BIN | SDCM 3 | 45 Ta max | 56°Tc

Artikel-Nr. Item no.	Lichtfarbe Light color	Typ. Farbtemp. Typ. color temp.	Typ. Leistung Typ. power	Typ. Lichtstrom Typ. light output	Typ. Effizienz Typ. efficiency	Typ. CRI	EEK EEC
52510834	tageslicht 850 | daylight	5000 K	0,96 W	46 lm	86 lm/W	85	A++
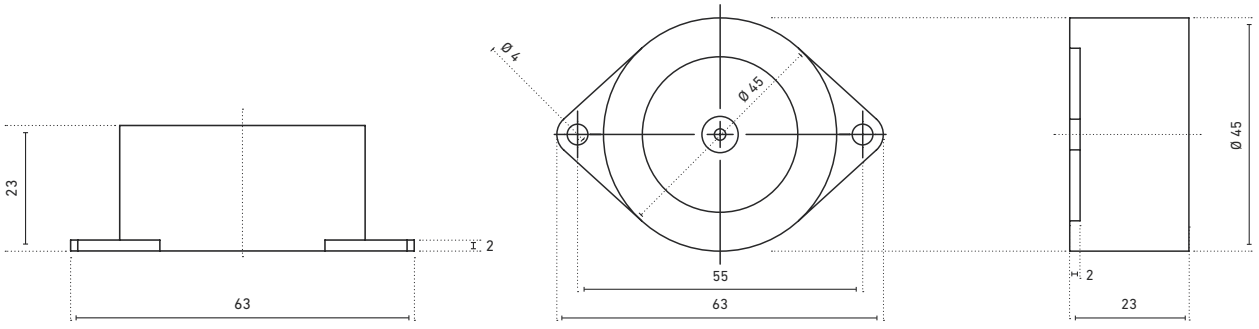
TECHNISCHE ZEICHNUNG | TECHNICAL DRAWING