



# MARSALA 6075-S

## 230 V-ANBAULEUCHTE | 230 V SURFACE-MOUNTED LUMINAIRE

- » dimmbare Anbauleuchte für vielseitige Anwendungsgebiete in Industrie und privaten Wohnbereichen
- » elegantes Design aus eloxiertem Aluminium
- » individuelle Länge nach Maß (680 mm bis 3.000 mm)
- » Abdeckungen können in verschiedenen Höhen eingebracht werden - entblendet, bündig oder 180°
- » erhöhter Lichtausstoß durch den weißen Reflektor im Einleger
- » hochwertiges Marken-Netzteil in Kombination mit effizienten LEDlight flex Streifen spart Energie, bei optimaler Raumausleuchtung
- » in Verbindung mit der opalweißen Abdeckung und dem passenden LEDlight flex LED-Streifen ist eine homogene Lichtlinie möglich

- » dimmable surface-mounted luminaire for a wide range of applications from industrial to private use
- » elegant design made of anodised aluminium
- » customized length made to measure (680 mm to 3,000 mm)
- » diffusers can be installed at different heights - glare-free, flush or 180°
- » increased light output due to the white reflector in the insert profile
- » high-quality branded power supply in combination with efficient LEDlight flex strips saves energy at optimum room illumination
- » homogeneous light line with opal white diffuser and matching LEDlight flex possible

# MARSALA 6075-S ANBAULEUCHTE | SURFACE-MOUNTED LUMINAIRE


ABMESSUNG | DIMENSIONS: 60 mm x 75 mm




IN NUR 6 SCHRITTEN ZU IHRER INDIVIDUELLEN LEUCHTE |  
IN ONLY 6 STEPS TO YOUR CUSTOMIZED LUMINAIRE

| L230             | 402                                       | 01                                              | XXXX                                                                                                                                                                                                                                                                                                              | XXXX                                  | XXXX                                                                                 | XXXX |
|------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------------------------------------------------------------------------|------|
| 1                | 2                                         | 3                                               | 4                                                                                                                                                                                                                                                                                                                 | 5                                     | 6                                                                                    |      |
| PROFIL   PROFILE | TYP   TYPE                                | LICHTFARBE   LIGHT COLOR                        | LED-STREIFEN   LED STRIP                                                                                                                                                                                                                                                                                          | WUNSCHLÄNGE IN MM   WISH LENGTH IN MM | ABDECKUNG   DIFFUSER                                                                 |      |
| MARSALA 6075-S   | Anbau-leuchte   surface mounted luminaire | 0027 - 2700 K<br>0030 - 3000 K<br>0040 - 4000 K | 0001 - LEDlight flex 08 8<br>HIGH EFFICIENCY<br>0002 - LEDlight flex 08 8<br>HIGH EFFICIENCY PLUS<br>0003 - LEDlight flex 08 8<br>HIGH EFFICIENCY PRO<br>0004 - LEDlight flex 12 8P<br>HIGH EFFICIENCY<br>0005 - LEDlight flex 12 8P<br>HIGH EFFICIENCY PLUS<br>0007 - LEDlight flex 12 8P<br>HIGH EFFICIENCY PRO |                                       | 0029 - opalweiß<br>opal white<br>0030 - satiniert<br>satined<br>0031 - klar<br>clear |      |

## BAUBARE LÄNGE | BUILD LENGTH

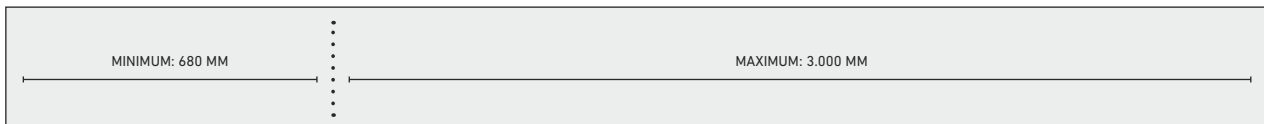

## TECHNISCHE ZEICHNUNG | TECHNICAL DRAWING

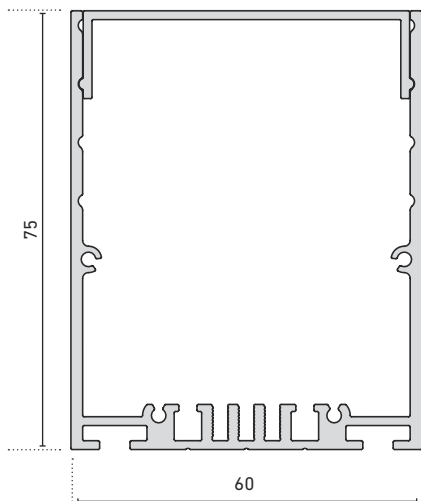

## LICHTVERTEILUNGSKURVE | LIGHT DISTRIBUTION CURVE

