

# LEDlight flex 16 8p STANDARD 1000 2.0

- Length 2000 cm
- LED strips for common applications
- ideal for use in living areas
- long operating life L70/B50 > 60,000 h at Tc < 80 °C
- current regulation by IC for constant brightness over the entire light line
- max. operable length: 11.10 m at 24 V at the feed point
- with TVS surge protection diode
- with high-quality 3M double adhesive tape



**Please observe the installation and safety instructions at <https://www.barthelme.de/content/en/manuals.aspx> !**

Note re light sources/EPREL: Our LED reels are not subject to classification according to the currently valid regulations. An LED reel contains interconnected light sources, the number and energy efficiency class of which are listed in the data sheet.

## PHOTOMETRIC DATA



	50413428	50413433	50413434
Typ. color temperature	2700 K	3000 K	4000 K
Light color	warm white	white	cold white
Typ. luminous flux per meter	930 lm/m	1080 lm/m	1090 lm/m
Efficiency	95 lm/W	110 lm/W	111 lm/W
Built-in light source	C50013328	C50013333	C50013334
Number of light sources	200		
EEC of built-in light source	F		
Typ. color rendering index	90		
LED beam angle	120 °		
Lifetime L70	>60000 h		

## ELECTRICAL DATA

	50413428	50413433	50413434
Operating voltage	24 V DC		
Typ. operating current	8,17 A		
Typ. power	196 W		
Typ. power per meter	9,8 W/m		

## MECHANICAL DATA

	50413428	50413433	50413434
Length stripe	20000 mm		
Width stripe	8 mm		
Height stripe	1,4 mm		
Number of LEDs per cut	6		
Number of LEDs per metre	60		
Number of cuts	200		
Length per cut	100 mm		
Type of protection	IP 00		
Bending radius	20 mm		
Länge Anschlusskabel	500 mm		

	50013328	50013333	50013334
<b>Color temperature</b>	2700 K	3000 K	4000 K
<b>EEC of built-in light source</b>	F		
<b>Cut</b>	Cut length 100 mm, 2700 K	Cut length 100 mm, 3000 K	Cut length 100 mm, 4000 K

ORDER YOUR DESIRED INDIVIDUAL STRIP LENGTH [CUT]: The order quantity is a multiple of the smallest cutting length of the LED strip (cut). Ordering example: To order your required length of 210 cm of LEDlight flex High Efficiency 08 8 cool white (4000 K): 35x Art.-No. 50008634 (cut length 60 mm x 35 = 210 cm). If you re-quire varying strip lengths then please order each strip length as a separate position.


## FURTHER DATA

	50413428	50413433	50413434
<b>Max. operable length<sup>1</sup></b>		11100 mm	
<b>Storage temperature</b>		-30° C ~ +80° C	
<b>Max. temperature Tc<sup>2</sup></b>		80° C	


<sup>1</sup>The value given applies to the application of the rated voltage at the first module section. When using a supply line, the maximum operable length changes depending on the supply line length and its cross section. At [www.barthelme.de](http://www.barthelme.de) you will find an overview table for orientation.

<sup>2</sup>The Tc point is marked on each cut. This should be measured in the thermally stable state.

## TECHNICAL DRAWING

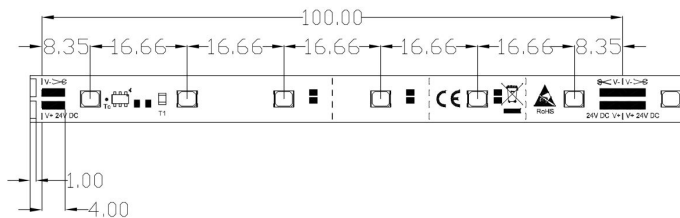

## USE IN PROFILES

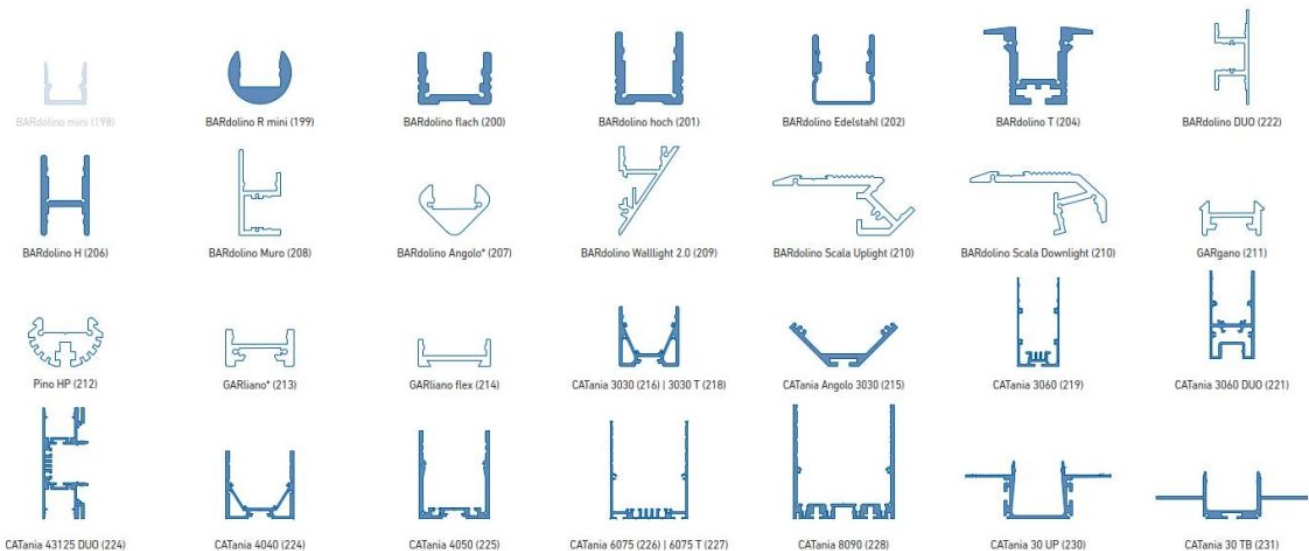

weiß: LED-Punkte sichtbar, kein homogenes Lichtbild | white: LED dots visible, no uniform light distribution  
blau: homogenes Lichtbild möglich | blue: uniform light distribution is possible

\* = eine homogene Lichtlinie ist nur in Kombination mit einer hohen Abdeckung möglich | a uniform light line is only possible in combination with a high diffuser

@ max. Ta = 25 °C im Betrieb und Montage-situation Aufbau [Einbau bei CATania 30 UP und CATania 30 TB] ansonsten ggf. unzureichende Kühlung | @ max. Ta = 25 °C in operation and surface mounted installation [recessed installation with CATania 30 UP and CATania 30 TB] otherwise possibility of insufficient cooling  
Bitte beachten: Unzureichende Kühlung beschädigt den LED-Streifen! Verarbeitungshinweise zu LEDlight flex siehe [www.barthelme.de](http://www.barthelme.de) | Please note: insufficient cooling will damage the LED strips! Processing notes for LEDlight flex see [www.barthelme.de](http://www.barthelme.de)

## NOTE

LEDs and the electronic components/devices required for their operation are wearing parts and can function for many years depending on use and location. In general, these products are subject to an aging process, the light output of LEDs decreases in the course of their operating life. The aging of LEDs is due to thermal influences. Our LEDs correspond to the operating life, which has e.g. a L90/B10 value. This means that the installed LEDs of a given type retain at least 90% of their luminous efficiency and a maximum of 10% of the installed LEDs can deviate from this. Thus, the decrease of the luminous effect of the LED within the above-mentioned scope within the operating life does not represent a defect according to the current state of technology.

Never glue the LED strip over a profile joint! Due to physical expansion or contraction of the profile due to temperature fluctuations, the LED strip can be damaged. This can be remedied by using the right parts for the solder pads at the joint and by using flexible connections, e.g. soldered flexible wire bridges or LED strip connectors.

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.

## ENTSORGUNG

Bitte helfen Sie mit, Abfall zu vermeiden. Sollten Sie sich einmal von diesem Artikel trennen wollen, so bedenken Sie bitte, dass viele seiner Komponenten aus wertvollen Rohstoffen bestehen und wiederverwertet werden können. Entsorgen Sie ihn daher nicht in der Mülltonne, sondern führen Sie ihn bitte Ihrer Sammelstelle für Elektrogeräte zu. Vielen Dank für Ihre Mithilfe!

