

CHROMOFLEX Casambi

- wired allround dimmer, 4 controllable channels from monochrome to RGBW/RGBA
- for controlling LED systems via Bluetooth via tablet or smartphone
- completely networkable with all CASAMBI compatible devices
- compatible with Android (from version 4.4) and iOS (from version 7)
- high PWM frequency of 2 kHz
- com+ common anode




TECHNICAL DATA



	66000465
Number of channels	4
Operating voltage DC	10 V DC~48 V DC
Output voltage DC	10 V DC~48 V DC
Output current per channel	4 A
Max. total power	384 W
Power consumption in standby mode	Psb: max. 0,5 W
Power consumption in network standby mode	Pnet: max. 0,5 W
Power consumption in idle mode	not intended for this
Light source type	suitable for LED
Efficiency at full load	99 %
Strain relief	Yes
Material	plastics
Connection via	screw terminals
Color of body	grey / blue
Ambient temperature	0~+50 ° C
Max. temperature Tc	80 ° C
Length	116 mm
Width	52 mm
Height	21,5 mm
Remarks	4 freely assignable push button inputs Casambi compatibility: classic and evolution 4A per channel @24V; 2A per channel @48V

ANSCHLUSS-SCHEMA:

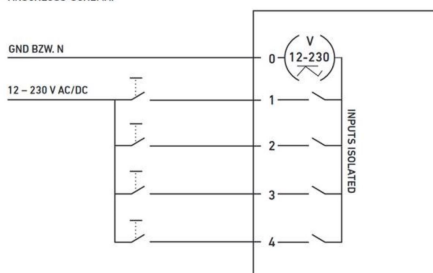

ACCESSORIES



	66000469
Description	CHROMOFLEX CASAMBI remote control
Material	plastics
Radio frequency	2,4GHz
Colour	schwarz
Type of protection	IP 20
Length	90 mm
Width	90 mm
Height	12 mm
Remarks	Type of battery: CR2430

The guarantee period for the product is 5 years and begins on the day of shipment. Reference is the date of the delivery bill. The guarantee period may differ for accessories.

RECOMMENDATION FOR DISPOSAL

Please help to avoid waste. Should you ever wish to part with this item, please remember that many of its components are made of valuable raw materials and can be recycled. Therefore, please do not dispose of it in the dustbin, but please take it to your collection point for electrical appliances. Thank you for your cooperation!

